

## Lecture Notes

-

### Progettazione Assistita di Organi di Macchina Progettazione del Telaio FEM Fundamentals and Chassis Design

Enrico Bertocchi, Sara Mantovani

May 16, 2018

## Chapter 1

# Spatial beam structures

## 1.1 Beam axis and cross section definition

A basic necessary condition for identifying a deformable body as a beam – and hence applying the associated framework – is that its centroidal curve be at least loosely recognizable.

Once such centroidal line has been roughly defined, locally perpendicular planes may be derived whose intersection with the body itself defines the local beam cross section.

Then, the  $G$  center of gravity position may be computed for each of the local cross sections, leading to a refined, potentially iterative definition for the beam centroidal axis<sup>1</sup>.

A local cross-sectional reference system may be defined by aligning the normal  $z$  axis with the beam centroidal curve, and by employing, as the first in-section axis, namely  $x$ , the projection of a given global  $\underline{y}$  vector, which is assumed not to be parallel to the beam axis.

The second in-section axis  $y$  may be then derived, in order to obtain a  $Gxyz$  right-handed coordinate system, whose unit vectors are  $\hat{i}, \hat{j}, \hat{k}$ .

If a thin walled profile is considered in place of a solid cross section member – i.e., the section wall midplane is recognizable too (see paragraph XXX), then a curvilinear coordinate  $0 \leq s \leq l$  may be defined that spans the in-cross-section wall midplane, along with a local through-wall-thickness coordinate  $-t(s)/2 \leq r \leq +t(s)/2$ .

Such  $s, r$ , in-section coordinates based on the profile wall may be employed in place of their cartesian  $x, y$  counterparts, if favourable.

Beam axis may be discontinuous at sudden body geometry changes; a rigid body connection is ideally assumed to restrict the relative motion of the proximal segments. Such rigid joint modeling may be extended to more complex  $n$ -way joints; if the joint finite stiffness is to be taken into account, it has to be described through the entries of a rank  $6(n - 1)$  symmetric square matrix <sup>2</sup>.

At joints or beam axis angular points the cylindrical bodies swept by the cross sections do usually overlap, besides they only loosely mimic the actual deformable body geometry; the results obtained through the local application of the elementary beam theory may at most be

<sup>1</sup>Here, centroidal curve, centroidal line, centroidal axis, or simply beam axis are treated as synonyms.

<sup>2</sup>i.e., joint stiffness is unfortunately not a scalar value.

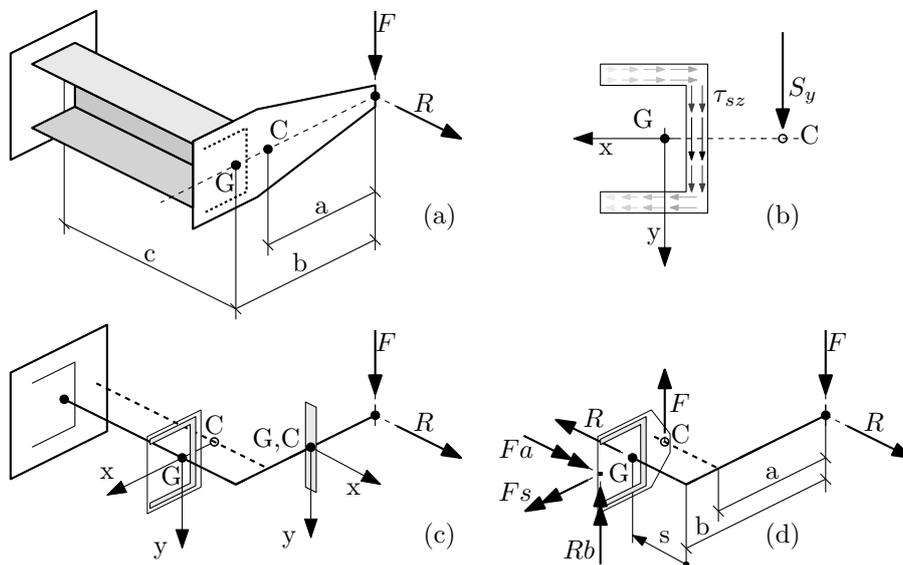


Figure 1.1: A beam structure.

employed to scale the triaxial local stress/strain fields<sup>3</sup>, which have to be evaluated resorting to more complex modelings.

### 1.1.1 A worked example

See Figure 1.1. TODO.

## 1.2 Cross-sectional resultants for the spatial beam

At any point along the axis the beam may be notionally split, thus obtaining two facing cross sections, whose interaction is limited to three components of interfacial stresses, namely the axial normal stress  $\sigma_{zz}$  and the two shear components  $\tau_{yz}, \tau_{zx}$ .

Three force resultant components may be defined by integration along the cross section area, namely the normal force, the  $y$ - and the

<sup>3</sup>The peak stress values obtained through the elementary beam theory may be profitably employed as *nominal stresses* within the stress concentration effect framework.

$x$ - oriented shear forces, respectively defined as

$$N = \int_{\mathcal{A}} \sigma_{zz} d\mathcal{A}$$

$$S_y = \int_{\mathcal{A}} \tau_{yz} d\mathcal{A}$$

$$S_x = \int_{\mathcal{A}} \tau_{zx} d\mathcal{A}$$

Three moment resultant components may be similarly defined, namely the  $x$ - and  $y$ - oriented bending moments, and the torsional moment. However, if the centroid is the preferred fulcrum for evaluating the bending moments, the below discussed  $C$  shear center is employed for evaluating the torsional moment. We hence define

$$\mathcal{M}_x = \int_{\mathcal{A}} \sigma_{zz} y d\mathcal{A}$$

$$\mathcal{M}_y = - \int_{\mathcal{A}} \sigma_{zz} x d\mathcal{A}$$

$$\mathcal{M}_t \equiv \mathcal{M}_z = \int_{\mathcal{A}} [\tau_{yz}(x - x_C) - \tau_{zx}(y - y_C)] d\mathcal{A}$$

The applied vector associated to the normal force component  $(G, N\hat{k})$  is located at the section center of gravity, whereas the shear force  $(C, S_x\hat{i} + S_y\hat{j})$  is supposed to act at the shear center; such convention decouples the energy contribution of force and moment components for the straight beam.

Cross section resultants may be obtained, based on equilibrium for a statically determinate structure. The ordinary procedure consists in

- notionally splitting the structure at the cross section whose resultants are under scrutiny;
- isolating a portion of the structure that ends at the cut, whose locally applied loads are all known; the structure has to be preliminarily solved for the all the constraint reactions that act on the isolated portion;
- setting the equilibrium equations for the isolated substructure, according to which the cross-sectional resultants are in equilibrium with whole loading.

### 1.3 Axial load and uniform bending

It is preliminarily noted that the elementary extensional-flexural solution is exact with respect to the Theory of Elasticity if the following conditions hold:

- beam constant section;
- beam rectilinear axis;
- absence of locally applied loads;
- absence of shear resultants<sup>4</sup> (i.e. constant bending moments);
- principal material directions of orthotropy are uniform along the section, and one of them is aligned with the beam axis;
- the  $\nu_{31}$  and the  $\nu_{32}$  Poisson’s ratios<sup>5</sup> are constant along the section, where 3 means the principal direction of orthotropy aligned with the axis. Please note that  $E_i\nu_{ji} = E_j\nu_{ij}$ , and hence  $\nu_{ji} \neq \nu_{ij}$  for a generally orthotropic material.

Most of the above conditions are in fact violated in many textbook structural calculations, thus suggesting that the elementary beam theory is robust enough to be adapted to practical applications, i.e. limited error is expected if some laxity is used in circumscribing its scope<sup>6</sup>.

The extensional-flexural solution builds on the basis of the following simplifying assumptions:

- the in-plane<sup>7</sup> stress components  $\sigma_x, \sigma_y, \tau_{xy}$  are null;
- the out-of-plane shear stresses  $\tau_{yz}, \tau_{zx}$  are also null;

<sup>4</sup>A locally pure shear solution may be in fact superposed; such solution may however not be available for a general cross section.

<sup>5</sup>We recall that  $\nu_{ij}$  is the Poisson’s ratio that corresponds to a contraction in direction  $j$ , being a unitary extension applied in direction  $i$  in a manner that the elastic body is subject to a uniaxial stress state.

<sup>6</sup>Measures for both the error and the violation have to be supplied first in order to quantify the approximation.

<sup>7</sup>Both the *in-plane* and the *out-of-plane* expressions for the characterization of the stress/strain components refer to the cross sectional plane.

- the axial elongation  $\epsilon_z$  linearly varies along the cross section, namely

$$\epsilon_z = a + bx + cy \quad (1.1)$$

or, equivalently<sup>8</sup>, each cross section is assumed to remain planar in the deformed configuration.

The three general constants  $a$ ,  $b$  and  $c$  possess a physical meaning; in particular  $a$  represents the axial elongation  $\bar{\epsilon}$  as measured at the centroid<sup>9</sup>,  $c$  represents the  $1/\rho_x$  curvature<sup>10</sup> whereas  $b$  represent the  $1/\rho_y$  curvature, apart from its sign.

Figure 1.2 (c) justifies the equality relation  $c = 1/\rho_x$ ; the beam axial fibers with a  $\Delta z$  initial length are elongated by the curvature up to a  $\Delta\theta(\rho_x + y)$  deformed length, where  $\Delta\theta\rho_x$  equates  $\Delta z$  based on the length of the unextended fibre at the centroid. By evaluating the axial strain value for a general fiber, it follows that  $\epsilon_z = 1/\rho_x y$ .

In addition, Figure 1.2 (c) relates the  $1/\rho_x$  curvature to the displacement component in the local  $y$  direction, namely  $v$ , and to the section rotation angle with respect to the local  $x$  axis, namely  $\theta$ , thus obtaining

$$\frac{d\theta}{dz} = \frac{1}{\rho_x}, \quad \theta = -\frac{dv}{dz}, \quad \frac{d^2v}{dz^2} = -\frac{1}{\rho_x} \quad (1.2)$$

Following analogous considerations, see 1.2 (e), we may similarly obtain

$$\frac{d\phi}{dz} = \frac{1}{\rho_y}, \quad \phi = +\frac{du}{dz}, \quad \frac{d^2u}{dz^2} = +\frac{1}{\rho_y} \quad (1.3)$$

where  $\phi$  is the cross section rotation about the local  $y$  axis, and  $u$  is the  $x$  displacement component.

According to the assumptions in the preamble, a uniaxial stress state is assumed, where the only nonzero  $\sigma_z$  stress component may be determined as

$$\sigma_z = E_z \epsilon_z = E_z \left( \bar{\epsilon} - \frac{1}{\rho_y} x + \frac{1}{\rho_x} y \right) \quad (1.4)$$

<sup>8</sup>The axial, out-of-plane displacement  $\Delta w = \int_{\Delta l} \epsilon_z dz = \Delta l (a + bx + cy)$  accumulated between two contiguous cross sections with an  $\Delta l$  initial distance, is consistent with that of a relative rigid body motion.

<sup>9</sup>or, equivalently, the average elongation along the section, in an integral sense.

<sup>10</sup>namely the inverse of the beam curvature radii as observed with a line of sight aligned with the  $x$  axis. Curvature is assumed positive if the associated  $\theta$  section rotation grows with increasing  $z$ , i.e.  $d\theta/dz > 0$ .

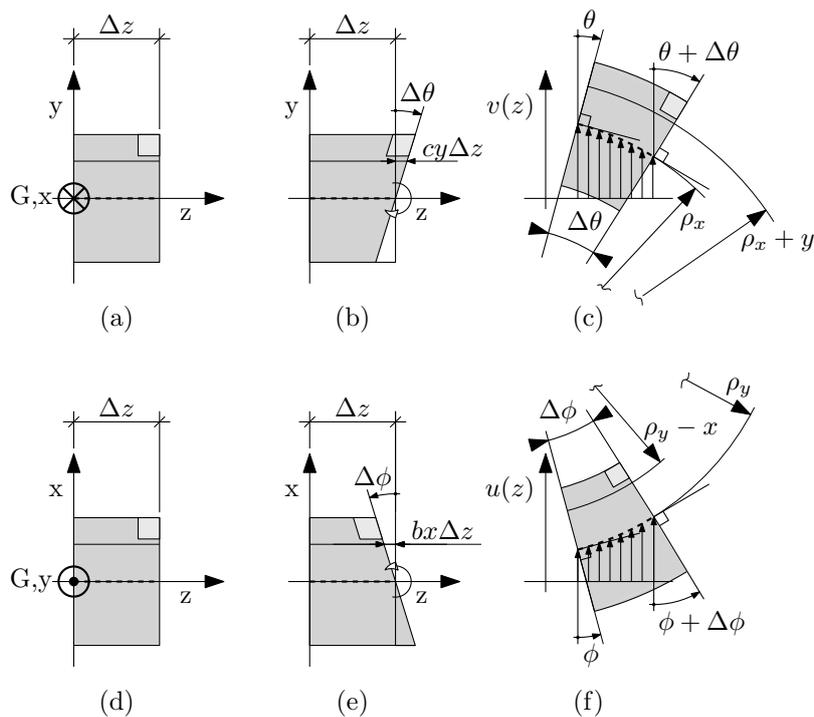


Figure 1.2: A differential fibre elongation proportional to the  $y$  coordinate induces a curvature  $1/\rho_x$  on the normal plane with respect to the  $x$  axis. A differential fibre contraction proportional to the  $x$  coordinate induces a curvature  $1/\rho_y$  on the normal plane with respect to the  $y$  axis. The didascalical trapezoidal deformation modes (b) and (e) clearly associate the differential elongation/contraction with the positive relative end rotation; they are however affected by a spurious shear deformation as evidenced by the skewed corner.

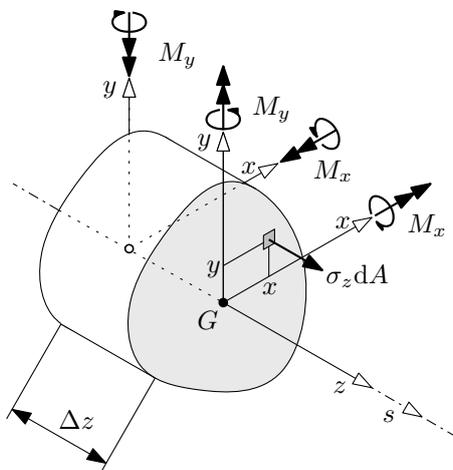


Figure 1.3: Positive  $x$  and  $y$  bending moment components adopt the same direction of the associated local axes at the beam segment end showing an outward-oriented arclength coordinate axis; at beam segment ends characterized by an inward-oriented local  $z$  axis, the same positive bending moment components are locally counter-oriented to the respective axes.

Stress resultants may easily be evaluated based on Fig. 1.3 as

$$N = \iint_{\mathcal{A}} E_z \epsilon_z dA = \overline{EA} \bar{\epsilon} \quad (1.5)$$

$$\mathcal{M}_x = \iint_{\mathcal{A}} E_z \epsilon_z y dA = \overline{EJ}_{xx} \frac{1}{\rho_x} - \overline{EJ}_{xy} \frac{1}{\rho_y} \quad (1.6)$$

$$\mathcal{M}_y = - \iint_{\mathcal{A}} E_z \epsilon_z x dA = -\overline{EJ}_{xy} \frac{1}{\rho_x} + \overline{EJ}_{yy} \frac{1}{\rho_y} \quad (1.7)$$

where the combined material/cross-section stiffness moduli

$$\overline{EA} = \iint_{\mathcal{A}} E_z(x, y) dA \quad (1.8)$$

$$\overline{EJ}_{xx} = \iint_{\mathcal{A}} E_z(x, y)yy dA \quad (1.9)$$

$$\overline{EJ}_{xy} = \iint_{\mathcal{A}} E_z(x, y)yx dA \quad (1.10)$$

$$\overline{EJ}_{yy} = \iint_{\mathcal{A}} E_z(x, y)xx dA \quad (1.11)$$

may also be rationalized as the cross section area and moment of inertia, respectively, multiplied by a suitably averaged Young modulus, evaluated in the axial direction.

Those moduli simplify to their usual  $E_z A, E_z J_{**}$  analogues, where the influence of the material and of the geometry are separated if the former is homogeneous along the beam cross section.

From Eqn. 1.5 we obtain

$$\bar{\epsilon} = \frac{N}{EA}. \quad (1.12)$$

By concurrently solving Eqns. 1.6 and 1.7 with respect to the  $1/\rho_x$  and  $1/\rho_y$  curvatures, we obtain

$$\frac{1}{\rho_x} = \frac{\mathcal{M}_x \overline{EJ}_{yy} + \mathcal{M}_y \overline{EJ}_{xy}}{\overline{EJ}_{xx} \overline{EJ}_{yy} - \overline{EJ}_{xy}^2} \quad (1.13)$$

$$\frac{1}{\rho_y} = \frac{\mathcal{M}_x \overline{EJ}_{xy} + \mathcal{M}_y \overline{EJ}_{xx}}{\overline{EJ}_{xx} \overline{EJ}_{yy} - \overline{EJ}_{xy}^2} \quad (1.14)$$

Axial strain and stress components may then be obtained for any cross section point by substituting the above calculated generalized strain components  $\bar{\epsilon}, 1/\rho_x$  and  $1/\rho_y$  holding for the extensional-flexural beam into Eqn. 1.4, thus obtaining

$$\sigma_z = E_z \epsilon_z \quad (1.15)$$

$$= \alpha \mathcal{M}_x + \beta \mathcal{M}_y + \gamma N \quad (1.16)$$

where

$$\alpha(x, y, E_z, \overline{EJ}_{**}) = E_z(x, y) \frac{-\overline{EJ}_{xy}x + \overline{EJ}_{yy}y}{\overline{EJ}_{xx}\overline{EJ}_{yy} - \overline{EJ}_{xy}^2} \quad (1.17)$$

$$\beta(x, y, E_z, \overline{EJ}_{**}) = E_z(x, y) \frac{-\overline{EJ}_{xx}x + \overline{EJ}_{xy}y}{\overline{EJ}_{xx}\overline{EJ}_{yy} - \overline{EJ}_{xy}^2} \quad (1.18)$$

$$\gamma(x, y, E_z, \overline{EA}) = E_z(x, y) \frac{1}{\overline{EA}}. \quad (1.19)$$

The peak axial strain is obtained at points farther from neutral axis of the stretched section; such neutral axis may be graphically defined as follows:

- the coordinate pair

$$(x_N, y_N) \equiv \left( \frac{\bar{\epsilon}\rho_x^2\rho_y}{\rho_x^2 + \rho_y^2}, -\frac{\bar{\epsilon}\rho_x\rho_y^2}{\rho_x^2 + \rho_y^2} \right);$$

defines its nearest pass-through point with respect to the  $G$  centroid; the two points coincide in the case  $\bar{\epsilon} = 0$ .

- its orientation is defined by the unit vector

$$\hat{n}_{\parallel} = \sqrt{\rho_x^2 + \rho_y^2} \left( \frac{1}{\rho_x}, \frac{1}{\rho_y} \right),$$

whereas the direction

$$\hat{n}_{\perp} = \sqrt{\rho_x^2 + \rho_y^2} \left( -\frac{1}{\rho_y}, \frac{1}{\rho_x} \right),$$

is orthogonal to the neutral axis, and oriented towards growing axial elongations.

The cross section projection on the  $(N, \hat{n}_{\perp})$  line defines a segment whose ends are extremal with respect to the axial strain.

If the bending moment and the curvature component vectors are imposed to be parallel, i.e.

$$\lambda \begin{bmatrix} \mathcal{M}_x \\ \mathcal{M}_y \end{bmatrix} = \begin{bmatrix} \frac{1}{\rho_x} \\ \frac{1}{\rho_y} \end{bmatrix} = \underbrace{\frac{1}{\overline{EJ}_{xx}\overline{EJ}_{yy} - \overline{EJ}_{xy}^2} \begin{bmatrix} \overline{EJ}_{yy} & \overline{EJ}_{xy} \\ \overline{EJ}_{xy} & \overline{EJ}_{xx} \end{bmatrix}}_{[\overline{EJ}]} \begin{bmatrix} \mathcal{M}_x \\ \mathcal{M}_y \end{bmatrix} \quad (1.20)$$

an eigenpair problem is defined that leads to the definition of the principal directions for the cross sectional bending stiffness. In particular, the eigenvectors of the  $[\overline{EJ}]$  matrix define the two principal bending stiffness directions, and the associated  $\overline{EJ}_{11}, \overline{EJ}_{22}$  eigenvalues constitute the associated bending stiffness moduli.

TODO: please elaborate...

## 1.4 Stresses due to the shear cross section resultants

In the presence of nonzero shear resultants, the bending moment exhibits a linear variation with the axial coordinate  $z$  in a straight beam. Based on the beam segment equilibrium we have

$$S_y = \frac{d\mathcal{M}_x}{dz}, \quad S_x = -\frac{d\mathcal{M}_y}{dz}, \quad (1.21)$$

as rationalized in Fig. XXX (a), with  $\Delta z \rightarrow 0$  and  $\mathcal{M}_x, \mathcal{M}_y$  differentiable with respect to  $z$ .

The linear variation of the bending-induced curvature in  $z$  causes a likewise linear variation of the pointwise axial strain; stress variation is also linear in the case of constant  $E_z$  longitudinal elastic modulus.

In particular, the differentiation with respect to  $z$  of  $\sigma_z$  as expressed in Eqn. 1.16 returns

$$\frac{d\sigma_z}{dz} = \alpha(x, y, E_z, \overline{EJ}_{**}) S_y - \beta(x, y, E_z, \overline{EJ}_{**}) S_x \quad (1.22)$$

since its  $\alpha, \beta, \gamma$  factors are constant with respect to  $z$ ; the bending moment derivatives are here expressed in terms of the shear resultants, as in Eqns. 1.21.

Figure 1.4 rationalizes the axial equilibrium for an elementary volume of material; we have

$$\frac{d\tau_{zx}}{dx} + \frac{d\tau_{yz}}{dy} + \frac{d\sigma_z}{dz} + q_z = 0 \quad (1.23)$$

where, for the specific case, the distributed volumetric load  $q_z$  is zero.

It clearly emerges from such relation that the shear stresses  $\tau_{zx}, \tau_{yz}$ , that were null within the uniform bending framework, are non-uniform along the section – and hence not constantly zero – in the presence of shear resultants.

A treatise on the pointwise solution of a) the equilibrium equations 1.23, once coupled with b) the compatibility conditions and with c) the the material elastic response, is beyond the scope of the present contribution, although it has been derived for selected cross sections in e.g. [?].

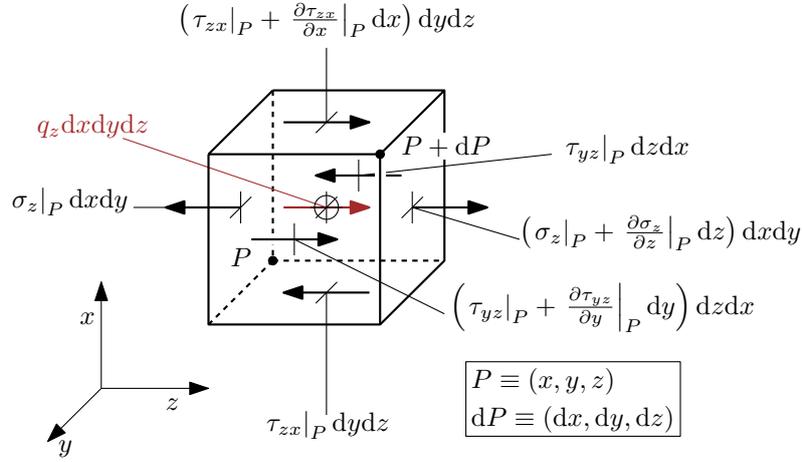


Figure 1.4: Equilibrium conditions with respect to the axial  $z$  translation for the infinitesimal volume extracted from the beam. In the case under scrutiny, the distributed volume action  $q_z$  is null.

### 1.4.1 The Jourawsky approach and its extension for a general section

The aforementioned axial equilibrium condition, whose treatise is cumbersome for the infinitesimal volume, may be more conveniently dealt with if a finite portion of the beam segment is taken into account, as in Figure 1.5.

A beam segment is considered whose axial extent is  $dz$ ; the beam cross section is partitioned based on a (possibly curve, see Fig. 1.4.1) line that isolates an area portion  $A^*$  – and the related beam segment portion – for further scrutiny; axial equilibrium equation may then be stated for the isolated beam segment portion as follows

$$\bar{\tau}_{zi} t = \int_{A^*} \frac{d\sigma_z}{dz} dA, \quad (1.24)$$

where

$$\bar{\tau}_{zi} = \frac{1}{t} \int_t \tau_{zi} dr \quad (1.25)$$

is the average shear stress acting in the  $z$  direction along the cutting surface;  $i$  is the (locally normal) inward direction with respect to such

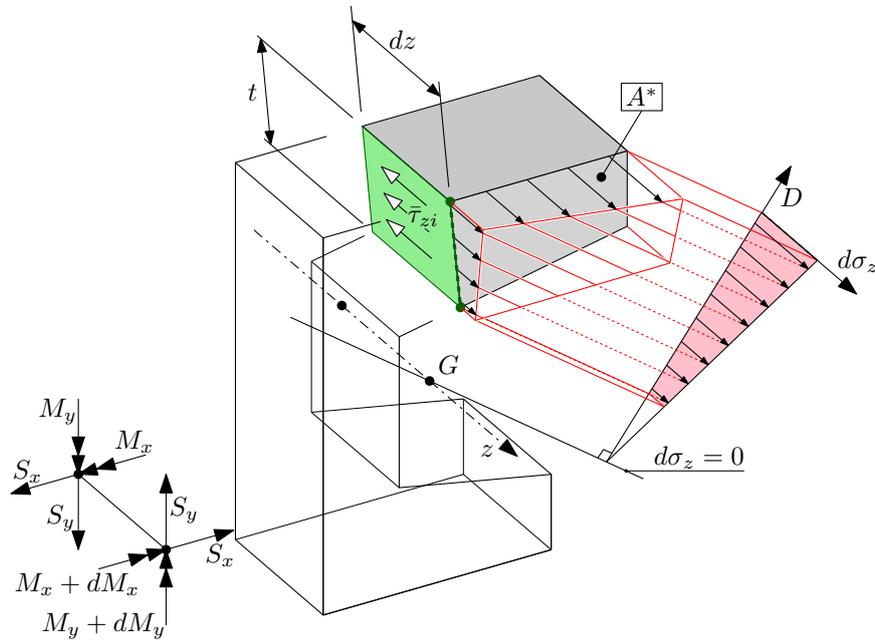


Figure 1.5: Equilibrium conditions for the isolated beam segment portion. It is noted that the null  $\sigma_z$  variation locus,  $d\sigma_z = 0$ , does not coincide with the bending neutral axis in general. Also, the depicted linear variation of  $d\sigma_z$  with the  $D$  distance from such null  $d\sigma_z$  locus does not hold in the case of non-uniform  $E_z$  modulus.

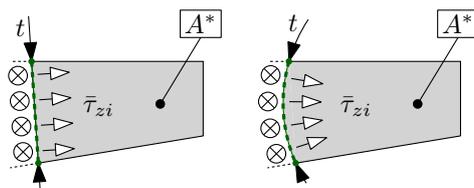


Figure 1.6: The curve employed for isolating the beam segment portion defines the direction of the  $\tau_{zi}$  components whose average value is evaluated.

a surface. Due to the reciprocal nature of the shear stresses, the same  $\bar{\tau}_{zi}$  shear stress acts along the cross sectional plane, and locally at the cutting curve itself. These shear actions are assumed positive if inward directed with respect to  $A^*$ .

The  $\bar{\tau}_{zi}t$  product is named *shear flow*, and may be evaluated along a general cutting curve.

It is noted that, according to Eqn. 1.24, no information is provided with regard to a) the  $\tau_{zt}$  shear stress that acts parallel to the cutting curve, nor b) the pointwise variation of  $\tau_{zi}$  with respect of its average value  $\bar{\tau}_{zi}$ . If the resorting to more cumbersome calculation frameworks is not an option, those quantities are usually just neglected; an informed choice for the cutting curve is thus critical for a reliable application of the method.

In the simplified case of a) uniform material and b) local  $x, y$  axes that are principal axes of inertia (i.e.  $J_{xy} = 0$ ), the usual formula is obtained

$$\bar{\tau}_{zi}t = \int_{A^*} \left( \frac{yS_y}{J_{xx}} + \frac{xS_x}{J_{yy}} \right) dA = \frac{\bar{y}^*A^*}{J_{xx}}S_y + \frac{\bar{x}^*A^*}{J_{yy}}S_x, \quad (1.26)$$

where  $\bar{y}^*A^*$  and  $\bar{x}^*A^*$  are the first order area moments of the  $A^*$  section portion with respect to the  $x$  and  $y$  axes, respectively<sup>11</sup>.

#### 1.4.2 Shear induced stresses in an open section, thin walled beam

In the case of thin walled profiles, the integral along the isolated area in Eqn. 1.24 may be performed with respect to the arclength coordinate alone; the value the  $d\sigma_z/dz$  integrand assumes at the wall midplane is supposed representative of its integral average along the wall thickness, thus obtaining

$$\bar{\tau}_{zi}t = \int_0^s \frac{d\sigma_z}{dz} t d\zeta. \quad (1.27)$$

Such assumed equivalence strictly holds for a) straight wall segments<sup>12</sup> and b) a linear variation of the integrand along the wall, a

<sup>11</sup>According to the employed notation,  $(\bar{x}^*, \bar{y}^*)$  are the centre of gravity coordinates for the  $A^*$  area.

<sup>12</sup>i.e. the Jacobian of the  $(s, r) \mapsto (x, y)$  mapping is constant with  $r$ .

condition, the latter, that holds if the material properties are homogeneous with respect to the wall midplane<sup>13</sup>; in the more general case, the error incurred by this approach vanishes with vanishing thickness for what concerns assumption a), whereas an average  $\bar{E}_z$  modulus may be employed in place of the pointwise  $E_z$  midplane value if the material is inhomogeneous.

If a thin walled section segment is considered such that it is not possible to infer that the interfacial shear stress is zero at at least one of its extremities, a further term needs to be considered for the equilibrium, thus obtaining

$$\bar{\tau}_{zi}(s)t(s) = \int_a^s \frac{d\sigma_z}{dz} t d\zeta + \bar{\tau}_{zi}(a)t(a). \quad (1.28)$$

In the case of open thin walled profiles, however, such a choice for the isolated section portion is suboptimal, unless the  $\bar{\tau}_{zi}(a)t(a)$  term is known.

### 1.4.3 Shear induced stresses in an closed section, thin walled beam

In the case of a closed thin walled, asymmetric section, the search for a point along the wall at which the shear flow may be assumed zero is generally not viable, and the employment of Eq. 1.4.3 in place of the simpler Eq. 1.27 is unavoidable.

In this case, a parametric value for the  $\tau_{zs}t$  shear stress flow is assumed for a set of points along the cross section midcurve – one for each elementary closed loop<sup>14</sup> if the points are non-redundantly chosen<sup>15</sup>.

In the multicellular cross section example shown in Figure 1.7, two elementary loops are detected; shear flows at the A, B points are parametrically defined as  $\tau_A t_A$  and  $\tau_B t_B$ , respectively.

<sup>13</sup>a linear  $d\epsilon_z/dz$  axial strain variation is in fact associated to the curvature variation in  $z$ , and not an axial stress variation;

<sup>14</sup>i.e. a closed loop not enclosing any other closed loop.

<sup>15</sup>Redundancy may be pointed out by ideally cutting the cross section at these points: if a monolithic open cross section is obtained, the point choice is not redundant; if a portion of the section is completely isolated, and a loop remains closed, the location of these points causes redundancy.

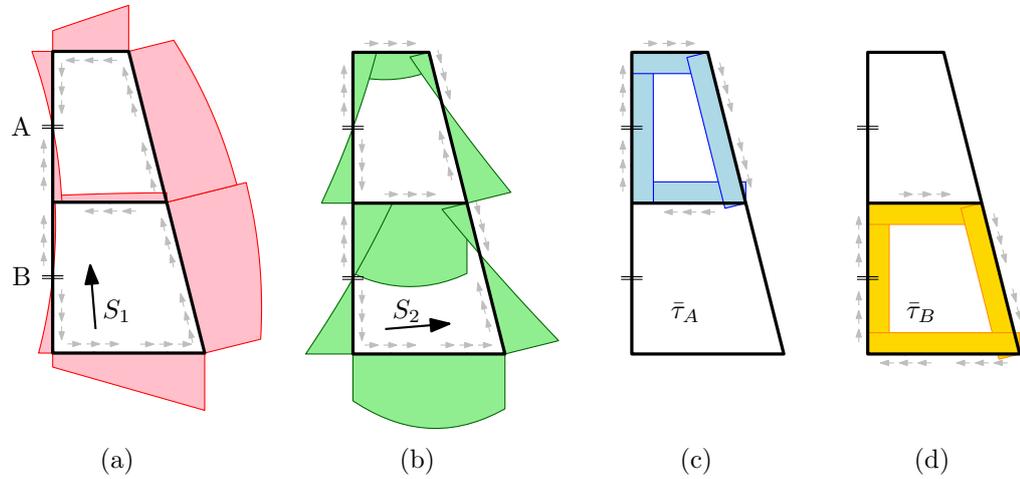


Figure 1.7: XXX.

The  $\tau_{z,s}$  shear stress for each point along the profile wall may then be determined based on Eqn. as a function a) of the shear resultant components  $S_x$  and  $S_y$ , and b) of the parametrically defined shear stress flows at the A,B points.

Due to the assumed linear response for the profile, superposition principle may be employed in isolating the four elementary contributions to the shear stress flow along the section.

The first two elementary contributions  $\tau_{;x}(s)$  and  $\tau_{;y}(s)$  are respectively due to the action alone of the  $x$  and  $y$  shear force components, whose magnitude is assumed equal the product of the stress unit (e.g. 1 MPa) and of the cross sectional area. Those forces are assumed to act in the ideal absence of shear flow at points where the latter is assumed as a parameter (points A and B in Figure 1.7).

Since the condition of zero shear flow is stress-compatible with an opening in the closed section loop, the cross section may be idealized as severed at the assumed shear flow points, and hence open. The equilibrium-based solution procedure derived for the open thin-walled section may hence be profitably applied.

A family of further elementary contributions, one for each of the assumed shear flow points, may be derived by imposing zero parametric shear flow at all the points but the one under scrutiny, and in the

absence of externally applied shear resultants. The elastic problem may be rationalized as an open – initially closed, then ideally severed – thin walled profile, that is loaded by an internal constraint action whose magnitude is unity in terms of stresses. Equilibrium considerations reduce to the conservation of the shear flow due to the absence of  $d\sigma_z/dz$  differential axial stress, as in the case of a closed profile under torsion discussed below.

Figures 1.7 (a) and (b) show the shear stress contributions  $\tau_{;1}(s)$  and  $\tau_{;2}(s)$  induced in the ideally opened (i.e. zero redundant shear flows at the A,B points) multicellar profile by the first and the second shear force components, respectively; due to the author distraction, such figure refers to shear components aligned with the principal directions of bending stiffness, and not to the usual  $x,y$  axes.

Figures 1.7 (c) and (d) show the shear stress contributions  $\tau_{;A}(s)$  and  $\tau_{;B}(s)$  associated to unity values for the parametric shear flows at the A, B segmentation points, respectively.

The cumulative shear stress distribution for the section in Figure 1.7 is

$$\tau(s) = S_1\tau_{;1}(s) + S_2\tau_{;2}(s) + \bar{\tau}_A\tau_{;A}(s) + \bar{\tau}_B\tau_{;B}(s) \quad (1.29)$$

where  $s$  is a suitable arclength coordinate.

The associated elastic potential energy may then be integrated over a  $\Delta z$  beam axial portion, thus obtaining

$$\Delta U = \int_s \frac{\tau^2}{G_{sz}} t\Delta z ds \quad (1.30)$$

According to the Castigliano second theorem, the  $\Delta U$  derivative with respect to the  $\bar{\tau}_i$  assumed shear stress value at the  $i$ -th segmentation point equates the generalized displacement with respect to which the internal constraint reaction works, i.e. the  $t\Delta z\bar{\delta}_i$  integral of the relative longitudinal displacement between the cut surfaces; we hence have

$$\frac{\partial \Delta U}{\partial \bar{\tau}_i} = \bar{\delta}_i t\Delta z \quad (1.31)$$

The  $\bar{\delta}_i$  symbol refers to the average value along the  $t\Delta z$  area of such axial relative displacement.

Material continuity requires zero  $\bar{\delta}_i$  value at each segmentation point, thus defining a set of equations, one for each  $\bar{\tau}_i$  unknown parameter, whose solution leads to the definition of the actual shear stress distribution along the closed wall profile.

## 1.5 Shear stresses due to the St. Venant torsion

The classical solution for the rectilinear beam subject to uniform torsion predicts a displacement field that is composed by the superposition of a) a rigid, in-plane<sup>16</sup> cross section rotation about the shear centre, named twist, of uniform axial rate, and b) an out-of-plane *warping* displacement that is uniform in the axial direction, whereas it varies within the section; such warping displacement is zero in the case of axisymmetric sections only (e.g. solid and hollow circular cross sections).

The in-plane stress components  $\sigma_x$ ,  $\sigma_y$ ,  $\tau_{xy}$  are assumed zero, along with the normal stress  $\sigma_z$ . The motion is internally restricted only due to the nonzero out-of-plane shear stresses  $\tau_{yz}$  and  $\tau_{zx}$ , that develop as an elastic reaction to the associated strain components.

A more in-depth treatise of the topic involves the solution of an plane, inhomogeneous Laplace differential equation with essential conditions imposed at the cross section boundary, which is beyond the scope of the present contribution.

However, in the case of open- and closed- section, thin walled beams, simplified solutions are available based on the assumptions that a) the out-of-plane shear stresses are locally aligned to the wall midsurface - i.e.  $\tau_{zr} = 0$  leaving  $\tau_{zs}$  as the only nonzero stress component<sup>17</sup>, and b) the residual  $\tau_{zs}$  shear component is either constant by moving through the wall thickness (closed section case), or it linearly varies with the through-thickness coordinate  $r$ .

### 1.5.1 Solid section beam

TODO.

### 1.5.2 Closed section, thin walled beam

The  $\tau_{sz}$  component is assumed uniform along the wall thickness, or, equivalently, its deviation from the average value is neglected in calculations.

<sup>16</sup>the rotation vector is actually normal to the cross sectional plane; the *in-plane* motion characterization refers to the associated displacement field.

<sup>17</sup>Here, the notation introduced in paragraph XXX for the thin walled section is employed.

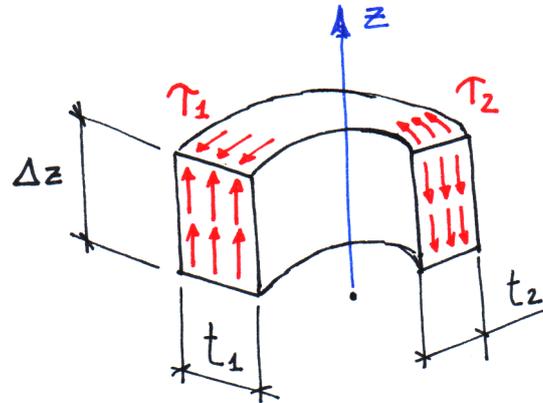


Figure 1.8: Axial equilibrium for a portion of profile wall, in the case of a closed, thin-walled profile subject to torsion.

In the case the material is non-uniform across the thickness, the  $\gamma_{sz}$  shear strain is assumed uniform, whereas the  $\tau_{sz}$  varies with the varying  $G_{sz}$  shear modulus.

In the absence of  $\sigma_z$ , the axial equilibrium of a portion of beam segment dictates that the shear flow  $t\tau$  remains constant along the wall, i.e.

$$t_1\tau_1 = t_2\tau_2$$

as depicted in Figure 1.8.

By skipping some further interesting observations (TODO) we may just introduce the Bredt formula for the cross-section torsional stiffness

$$K_t = \frac{4A^2}{\oint \frac{1}{t} dl} \quad (1.32)$$

which is valid for single-celled, closed thin wall sections.

The peak stress is located at thinnest point along the wall, and equals

$$\tau_{\max} = \frac{M_t}{2t_{\min}A} \quad (1.33)$$

Multi-celled beam profile? TODO.

### 1.5.3 Open section, thin walled beam

The shear strain component  $\gamma_{zs}$  is assumed linearly varying across the thickness; if the  $G_{sz}$  shear modulus is assumed uniform, such linear variation characterizes the  $\tau_{zs}$  stress components too.

The average value along the thickness of the  $\tau_{zs}$  stress component is zero, as zero is the shear flow as defined in the previous paragraph.

For thin enough open sections of uniform and isotropic material we have

$$K_T \approx \frac{1}{3} \int_0^l t^3(s) ds \quad (1.34)$$

If the thin-walled cross section may be described as a sequence of constant thickness wall segments, the simplified formula

$$K_T \approx \frac{1}{3} \sum_i l_i t_i^3 \quad (1.35)$$

is obtained where  $t_i$  and  $l_i$  are respectively the length and the thickness of each segment.

The peak value for the  $\tau_{zs}$  stress component is observed in correspondence to thickest wall section point and it equates

$$\tau_{\max} = \frac{M_t t_{\max}}{K_T} \quad (1.36)$$

By applying the reported formulas to a rectangular section whose span length is ten times the wall thickness, the torsional stiffness is overestimated by slightly less than 7%; a similar relative error is reported in terms of shear stress underestimation.

## 1.6 Castigliano’s second theorem and its applications

Castigliano’s second theorem may be employed for calculating deflections and rotations, and it states:

If the strain energy of an elastic structure can be expressed as a function of generalised loads  $Q_i$  (namely, forces or moments) then the partial derivative of the strain energy with respect to generalised forces supplies the generalised displacement  $q_i$  (namely displacements and rotations with respect to which the generalized forces work).

In equation form,

$$q_i = \frac{\partial U}{\partial Q_i}$$

where  $U$  is the strain energy.

## 1.7 Internal energy for the spatial straight beam

The linear density of the elastic potential (alternatively named internal) energy for the spatial rectilinear beam may be derived as a function of its cross section resultants, namely

$$\frac{dU}{dl} = \frac{J_{\eta\eta}M_\xi^2 + J_{\xi\xi}M_\eta^2 + 2J_{\xi\eta}M_\xi M_\eta}{2E(J_{\xi\xi}J_{\eta\eta} - J_{\xi\eta}^2)} + \frac{N^2}{2EA} \quad (1.37)$$

$$+ \frac{\chi_\xi S_\xi^2 + \chi_\eta S_\eta^2 + \chi_{\xi\eta} S_\eta S_\xi}{2GA} + \frac{M_t^2}{2GK_t} \quad (1.38)$$

where

- $A$ ,  $J_{\eta\eta}$ ,  $J_{\xi\xi}$  and  $J_{\xi\eta}$  are the section area and moments of inertia, respectively;
- $K_t$  is the section torsional stiffness (**not** generally equivalent to its polar moment of inertia);

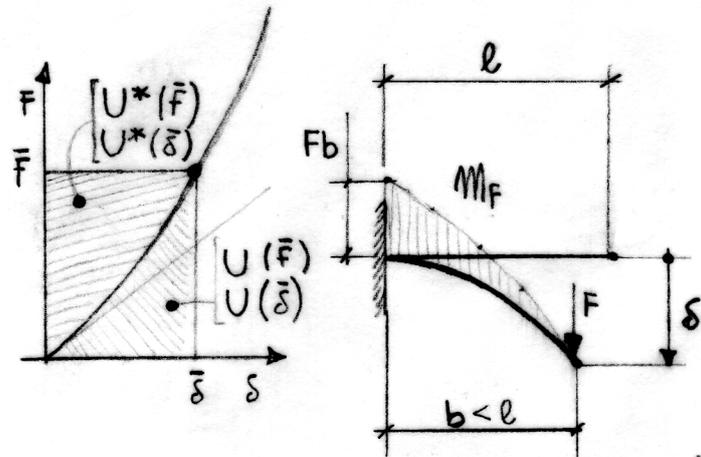


Figure 1.9: A nonlinearly elastic (namely stiffening) structure; the bending moment diagram is evaluated based on the beam portion equilibrium in its *deformed* configuration. The complementary elastic strain energy  $U^*$  is plotted for a given applied load  $\bar{f}$  or assumed displacement  $\bar{\delta}$ , alongside the elastic strain energy  $U$ .

- $E$  and  $G$  are the material Young Modulus and Shear Modulus, respectively; the material is assumed homogeneous, isotropic and linearly elastic.

The shear energy normalized coefficients  $\chi_\eta, \chi_\xi, \chi_{\xi\eta}$  are specific to the cross section geometry, and may be collected from the expression of the actual shear strain energy due to concurrent action of the  $S_\eta, S_\xi$  shear forces.

In cases of elastically nonlinear structures, the second Castigliano theorem may still be employed, provided that the complementary elastic strain energy  $U^*$  is employed in place of the strain energy  $U$ , see Fig. 1.9. The two energy terms are equal for linearly behaving structures.

## Chapter 2

# Fundamentals of Finite Element Method for structural applications

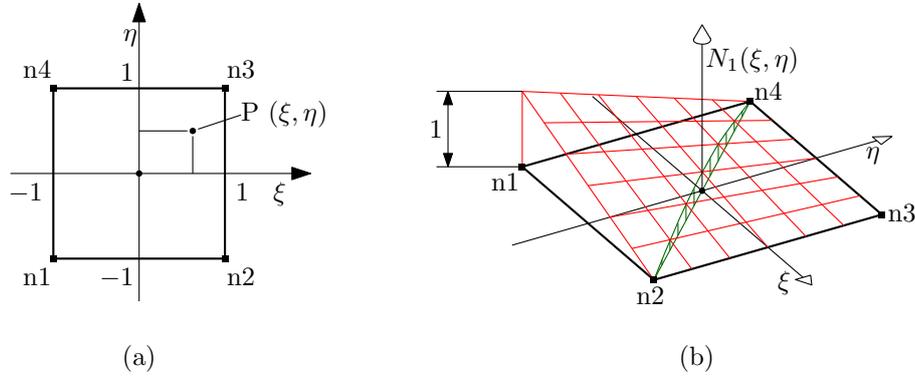


Figure 2.1: Quadrilateral elementary domain (a), and a representative weight function (b).

## 2.1 Preliminary results

### 2.1.1 Interpolation functions for the quadrilateral domain

**The elementary quadrilateral domain.** A quadrilateral domain is considered whose vertices are conventionally located at the  $(\pm 1, \pm 1)$  points of an adimensional  $(\xi, \eta)$  plane coordinate system, see Figure 2.1. Scalar values  $f_i$  are associated to a set of *nodal* points  $P_i \equiv [\xi_i, \eta_i]$ , which for the present case coincide with the quadrangle vertices, numbered as in Figure.

A  $f(\xi, \eta)$  interpolation function may be devised by defining a set of nodal influence functions  $N_i(\xi, \eta)$  to be employed as the coefficients (weights) of a moving weighted average

$$f(\xi, \eta) \stackrel{\text{def}}{=} \sum_i N_i(\xi, \eta) f_i \quad (2.1)$$

Requisites for such weight functions are:

- the influence of a node is unitary at its location, whereas the influence of the others locally vanishes, i.e.

$$N_i(\xi_j, \eta_j) = \delta_{ij} \quad (2.2)$$

where  $\delta_{ij}$  is the Kronecker delta function.

- for each point of the domain, the sum of the weights is unitary

$$\sum_i N_i(\xi, \eta) = 1, \forall [\xi, \eta] \quad (2.3)$$

Moreover, suitable functions should be continuous and straightforwardly differentiable up to any required degree.

Low order polynomials are ideal candidates for the application; for the particular domain, the nodal weight functions may be stated as

$$N_i(\xi, \eta) \stackrel{\text{def}}{=} \frac{1}{4} (1 \pm \xi) (1 \pm \eta), \quad (2.4)$$

where sign ambiguity is resolved for each  $i$ -th node by enforcing Eqn. 2.2.

The (2.3) combination of 2.4 functions turns into a general linear relation in  $(\xi, \eta)$  with coplanar in the  $\xi, \eta, f$  space – but otherwise arbitrary – nodal points.

Further generality may be introduced by *not* enforcing coplanarity.

The weight functions for the four-node quadrilateral are in fact quadratic although incomplete<sup>1</sup> in nature, due to the presence of the  $\xi\eta$  product, and the absence of any  $\xi^2, \eta^2$  term.

Each term, and the combined  $f(\xi, \eta)$  function, defined as in Eqn. 2.1, behave linearly if restricted to  $\xi = \text{const.}$  or  $\eta = \text{const.}$  loci – namely along the four edges; quadratic behaviour may instead arise along a general direction, e.g. along the diagonals, as in Fig. 2.1b example. Such behaviour is called *bilinear*.

We now consider the  $f(\xi, \eta)$  weight function partial derivatives. The partial derivative

$$\frac{\partial f}{\partial \xi} = \underbrace{\left(\frac{f_2 - f_1}{2}\right)}_{[\Delta f / \Delta \xi]_{12}} \underbrace{\left(\frac{1 - \eta}{2}\right)}_{N_1 + N_2} + \underbrace{\left(\frac{f_3 - f_4}{2}\right)}_{[\Delta f / \Delta \xi]_{43}} \underbrace{\left(\frac{1 + \eta}{2}\right)}_{N_4 + N_3} = a\eta + b \quad (2.5)$$

linearly varies from the incremental ratio value measured at the  $\eta = -1$  lower edge, to the value measured at the  $\eta = 1$  upper edge; the other partial derivative

$$\frac{\partial f}{\partial \eta} = \left(\frac{f_4 - f_1}{2}\right) \left(\frac{1 - \xi}{2}\right) + \left(\frac{f_3 - f_2}{2}\right) \left(\frac{1 + \xi}{2}\right) = c\xi + d. \quad (2.6)$$

<sup>1</sup>or, equivalently, *enriched linear*, as discussed above and in the following

behaves similarly, with  $c = a$ . However, partial derivatives in  $\xi, \eta$  remain constant along the corresponding differentiation direction <sup>2</sup>.

**The general quadrilateral domain.** The interpolation functions introduced above for the natural quadrilateral may be profitably employed in defining a coordinate mapping between a general quadrangular domain – see Fig. 2.2a – and its reference counterpart, see Figures 2.1 and 2.2b.

In particular, we first define the  $\underline{\xi}_i \mapsto \underline{x}_i$  coordinate mapping for the four vertices<sup>3</sup> alone, where  $\xi, \eta$  are the reference (or natural, or elementary) coordinates and  $x, y$  are their physical counterpart.

Then, a mapping for the inner points may be derived by interpolation, namely

$$\underline{x} = \underline{m}(\underline{\xi}) = \sum_{i=1}^4 N_i(\underline{\xi}) \underline{x}_i \quad (2.7)$$

The availability of an inverse  $\underline{m}^{-1} : \underline{x} \mapsto \underline{\xi}$  mapping is not granted; in particular, a closed form representation for such inverse is not generally available<sup>4</sup>.

In the absence of an handy inverse mapping function, it is convenient to reinstate the interpolation procedure obtained for the natural domain, i.e.

$$f(\xi, \eta) \stackrel{\text{def}}{=} \sum_i N_i(\xi, \eta) f_i \quad (2.8)$$

The four  $f_i$  nodal values are interpolated based on the *natural*  $\xi, \eta$  coordinates of an inner  $P$  point, and not as a function of its physical  $x, y$  coordinates, that are never promoted to the independent variable role.

As already mentioned, the  $\underline{m}$  mapping behaves linearly along  $\eta = \text{const.}$  and  $\xi = \text{const.}$  one dimensional subdomains, and in particular along

<sup>2</sup>The relevance of such partial derivative orders will appear clearer to the reader once the strain field will have been derived in paragraph XXX.

<sup>3</sup>The condensed notation  $\underline{\xi}_i \equiv (\xi_i, \eta_i)$ ,  $\underline{x}_i \equiv (x_i, y_i)$  for coordinate vectors is employed.

<sup>4</sup>Inverse relations are derived in [1], which however are case-defined and based on a selection table; for a given  $\underline{\bar{x}}$  physical point, however, Newton-Raphson iterations rapidly converge to the  $\underline{\bar{\xi}} = \underline{m}^{-1}(\underline{\bar{x}})$  solution if the centroid is chosen for algorithm initialization, see Section XXX

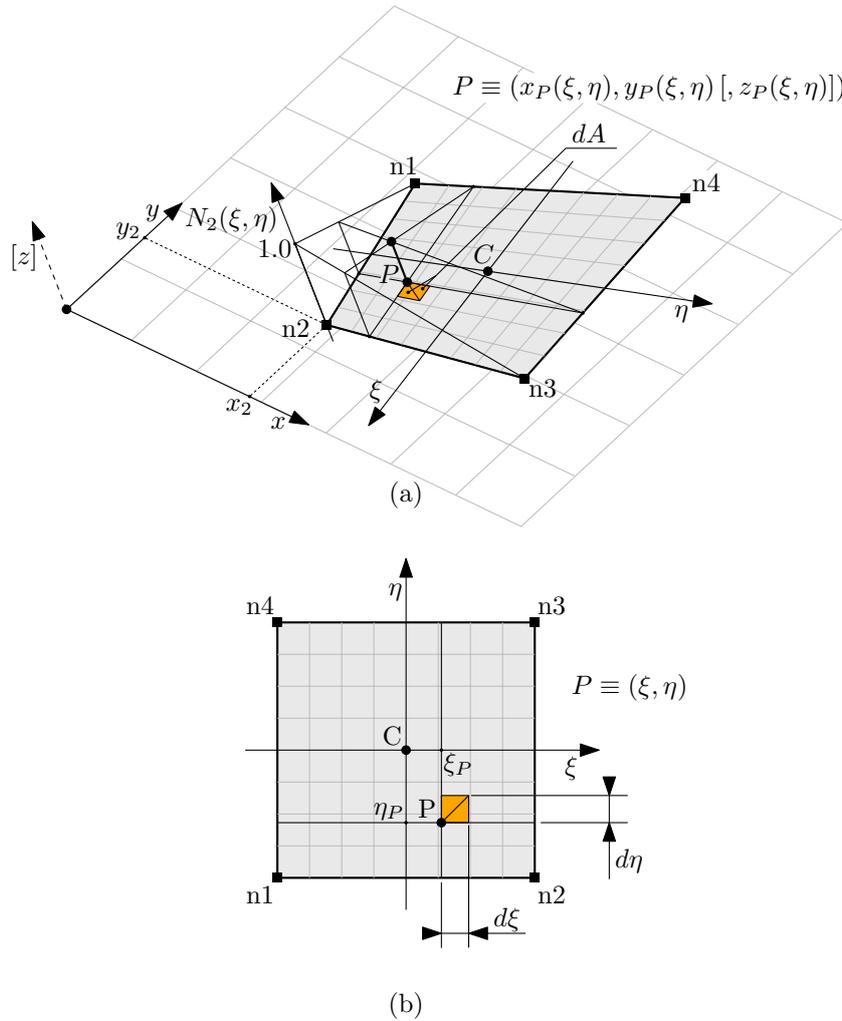


Figure 2.2: Quadrilateral general domain, (a), and its reference counterpart (b). If the general quadrangle is defined within a spatial environment, and not as a figure lying on the  $xy$  plane, limited  $z_i$  offsets are allowed at nodes with respect to such plane, which are not considered in Figure.

the quadrangle edges<sup>5</sup>; the inverse mapping  $\underline{m}^{-1}$  exists along these line segments under the further condition that their length is nonzero<sup>6</sup>, and it is a linear function<sup>7</sup>. Being a composition of linear functions, the interpolation function  $f(\underline{m}^{-1}(x, y))$  is also linear along the aforementioned subdomains, and in particular along the quadrangle edges.

The directional derivatives of  $f$  with respect to  $x$  or  $y$  are obtained based the indirect relation

$$\begin{bmatrix} \frac{\partial f}{\partial \xi} \\ \frac{\partial f}{\partial \eta} \end{bmatrix} = \underbrace{\begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial y}{\partial \xi} \\ \frac{\partial x}{\partial \eta} & \frac{\partial y}{\partial \eta} \end{bmatrix}}_{\underline{J}'(\xi, \eta)} \begin{bmatrix} \frac{\partial f}{\partial x} \\ \frac{\partial f}{\partial y} \end{bmatrix} \quad (2.9)$$

The function derivatives with respect to  $\xi, \eta$  are obtained as

$$\begin{bmatrix} \frac{\partial f}{\partial \xi} \\ \frac{\partial f}{\partial \eta} \end{bmatrix} = \sum_i \begin{bmatrix} \frac{\partial N_i}{\partial \xi} \\ \frac{\partial N_i}{\partial \eta} \end{bmatrix} f_i. \quad (2.10)$$

The *transposed* Jacobian matrix of the mapping function that appears in 2.9 is

$$\underline{J}'(\xi, \eta) = \begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial y}{\partial \xi} \\ \frac{\partial x}{\partial \eta} & \frac{\partial y}{\partial \eta} \end{bmatrix} \quad (2.11)$$

$$= \sum_i \left( \begin{bmatrix} \frac{\partial N_i}{\partial \xi} & 0 \\ \frac{\partial N_i}{\partial \eta} & 0 \end{bmatrix} x_i + \begin{bmatrix} 0 & \frac{\partial N_i}{\partial \xi} \\ 0 & \frac{\partial N_i}{\partial \eta} \end{bmatrix} y_i \right) \quad (2.12)$$

If the latter matrix is assumed nonsingular – condition, this, that pairs the bijective nature of the  $\underline{m}$  mapping, equation 2.9 may be

<sup>5</sup>see paragraph XXX

<sup>6</sup>The case exists of an edge whose endpoints are superposed, i.e. the edge collapses to a point.

<sup>7</sup>A constructive proof may be defined for each edge by retrieving the non-uniform amongst the  $\xi, \eta$  coordinates, namely  $\lambda$ , as the ratio

$$\lambda = 2 \frac{(x_Q - x_i)(x_j - x_i) + (y_Q - y_i)(y_j - y_i)}{(x_j - x_i)^2 + (y_j - y_i)^2} - 1,$$

where  $Q$  is a generic point along the edge, and  $i, j$  are the two subdomain endpoints at which  $\lambda$  equates  $-1$  and  $+1$ , respectively. A similar function may be defined for any constant  $\xi, \eta$  segment.

inverted, thus leading to the form

$$\begin{bmatrix} \frac{\partial f}{\partial x} \\ \frac{\partial f}{\partial y} \end{bmatrix} = (\underline{\underline{J}}')^{-1} \begin{bmatrix} \dots & \frac{\partial N_i}{\partial \xi} & \dots \\ \dots & \frac{\partial N_i}{\partial \eta} & \dots \end{bmatrix} \begin{bmatrix} \vdots \\ f_i \\ \vdots \end{bmatrix}, \quad (2.13)$$

where the inner mechanics of the matrix-vector product are appointed for the Eq. 2.10 summation.

### 2.1.2 Gaussian quadrature rules for some relevant domains.

**Reference one dimensional domain.** The gaussian quadrature rule for approximating the definite integral of a  $f(\xi)$  function over the  $[-1, 1]$  reference interval is constructed as the customary weighted sum of internal function samples, namely

$$\int_{-1}^1 f(\xi) d\xi \approx \sum_{i=1}^n f(\xi_i) w_i; \quad (2.14)$$

Its peculiarity is to employ location-weight pairs  $(\xi_i, w_i)$  that are optimal with respect to the polynomial class of functions. Nevertheless, such choice has revealed itself to be robust enough for for a more general employment.

Let's consider a  $m$ -th order polynomial

$$p(\xi) \stackrel{\text{def}}{=} a_m \xi^m + a_{m-1} \xi^{m-1} + \dots + a_1 \xi + a_0$$

whose exact integral is

$$\int_{-1}^1 p(\xi) d\xi = \sum_{j=0}^m \frac{(-1)^j + 1}{j+1} a_j$$

The integration residual between the exact definite integral and the weighted sample sum is defined as

$$r(a_j, (\xi_i, w_i)) \stackrel{\text{def}}{=} \sum_{i=1}^n p(\xi_i) w_i - \int_{-1}^1 p(\xi) d\xi \quad (2.15)$$

The optimality condition is stated as follows: the quadrature rule involving  $n$  sample points  $(\xi_i, w_i)$ ,  $i = 1 \dots n$  is optimal for the  $m$ -th order polynomial if a) the integration residual is null for general

$a_j$  values, and b) such condition does not hold for any lower-order sampling rule.

Once observed that the zero residual requirement is satisfied by any sampling rule if the polynomial  $a_j$  coefficients are all null, condition a) may be enforced by imposing that such zero residual value remains constant with varying  $a_j$  terms, i.e.

$$\left\{ \frac{\partial r(a_j, (\xi_i, w_i))}{\partial a_j} = 0, \quad j = 0 \dots m \right. \quad (2.16)$$

A system of  $m + 1$  polynomial equations of degree<sup>8</sup>  $m + 1$  is hence obtained in the  $2n$   $(\xi_i, w_i)$  unknowns; in the assumed absence of redundant equations, solutions do not exist if the constraints outnumber the unknowns, i.e.  $m > 2n - 1$ . Limiting our discussion to the threshold condition  $m = 2n - 1$ , an attentive algebraic manipulation of Eqns. 2.16 may be performed in order to extract the  $(\xi_i, w_i)$  solutions, which are unique apart from the pair permutations<sup>9</sup>.

Eqns. 2.16 solutions are reported in Table 2.1 for quadrature rules

<sup>8</sup>the  $(m + 1)$ -th order  $w_m \xi^m$  term appears in equations

<sup>9</sup> In this note, location-weight pairs are obtained for the gaussian quadrature rule of order  $n = 2$ , aiming at illustrating the general procedure. The general  $m = 2n - 1 = 3$ rd order polynomial is stated in the form

$$p(\xi) = a_3 \xi^3 + a_2 \xi^2 + a_1 \xi + a_0, \quad \int_{-1}^1 p(\xi) d\xi = \frac{2}{3} a_2 + 2a_0,$$

whereas the integral residual is

$$r = a_3 (w_1 \xi_1^3 + w_2 \xi_2^3) + a_2 \left( w_1 \xi_1^2 + w_2 \xi_2^2 - \frac{2}{3} \right) + a_1 (w_1 \xi_1 + w_2 \xi_2) + a_0 (w_1 + w_2 - 2)$$

Eqns 2.16 may be derived as

$$\begin{cases} 0 = \frac{\partial r}{\partial a_3} = w_1 \xi_1^3 + w_2 \xi_2^3 & (e_1) \\ 0 = \frac{\partial r}{\partial a_2} = w_1 \xi_1^2 + w_2 \xi_2^2 - \frac{2}{3} & (e_2) \\ 0 = \frac{\partial r}{\partial a_1} = w_1 \xi_1 + w_2 \xi_2 & (e_3) \\ 0 = \frac{\partial r}{\partial a_0} = w_1 + w_2 - 2 & (e_4) \end{cases}$$

which are independent of the  $a_j$  coefficients.

By composing  $(e_1 - \xi_1^2 e_3) / (w_2 \xi_2)$  it is obtained that  $\xi_2^2 = \xi_1^2$ ;  $e_2$  may then be written as  $(w_1 + w_2) \xi_1^2 = 2/3$ , and then as  $2\xi_1^2 = 2/3$ , according to  $e_4$ . It derives that  $\xi_{1,2} = \pm 1/\sqrt{3}$ . Due to the opposite nature of the roots,  $e_3$  implies  $w_2 = w_1$ , relation, this, that turns  $e_4$  into  $2w_1 = 2w_2 = 2$ , and hence  $w_{1,2} = 1$ .

$n$	$\xi_i$	$w_i$
1	0	2
2	$\pm \frac{1}{\sqrt{3}}$	1
3	0 $\pm \sqrt{\frac{3}{5}}$	$\frac{8}{9}$ $\frac{5}{9}$
4	$\pm \sqrt{\frac{3}{7} - \frac{2}{7}\sqrt{\frac{6}{5}}}$	$\frac{18+\sqrt{30}}{36}$
	$\pm \sqrt{\frac{3}{7} + \frac{2}{7}\sqrt{\frac{6}{5}}}$	$\frac{18-\sqrt{30}}{36}$

Table 2.1: Integration points for the lower order gaussian quadrature rules.

with up to  $n = 4$  sample points<sup>10</sup>.

It is noted that the integration points are symmetrically distributed with respect to the origin, and that the function is never sampled at the  $\{-1, 1\}$  extremal points.

**General one dimensional domain.** The extension of the one dimensional quadrature rule from the reference domain  $[-1, 1]$  to a general  $[a, b]$  domain is pretty straightforward, requiring just a change of integration variable to obtain the following

$$\begin{aligned} \int_a^b f(x)dx &= \frac{b-a}{2} \int_{-1}^1 f\left(\frac{b+a}{2} + \frac{b-a}{2}\xi\right) d\xi, \\ &\approx \frac{b-a}{2} \sum_{i=1}^n f\left(\frac{b+a}{2} + \frac{b-a}{2}\xi_i\right) w_i. \end{aligned}$$

**Reference quadrangular domain.** A quadrature rule for the reference quadrangular domain of Figure 2.1a may be derived by nesting the quadrature rule defined for the reference interval, see Eqn. 2.14, thus obtaining

$$\int_{-1}^1 \int_{-1}^1 f(\xi, \eta) d\xi d\eta \approx \sum_{i=1}^p \sum_{j=1}^q f(\xi_i, \eta_j) w_i w_j \quad (2.17)$$

<sup>10</sup>see <https://pomax.github.io/bezierinfo/legendre-gauss.html> for higher order gaussian quadrature rule sample points.

where  $(\xi_i, w_i)$  and  $(\eta_j, w_j)$  are the coordinate-weight pairs of the two quadrature rules of  $p$  and  $q$  order, respectively, employed for spanning the two coordinate axes. The equivalent notation

$$\int_{-1}^1 \int_{-1}^1 f(\xi, \eta) d\xi d\eta \approx \sum_{l=1}^{pq} f(\underline{\xi}_l) w_l \quad (2.18)$$

emphasises the characteristic nature of the  $pq$  point/weight pairs for the domain and for the quadrature rule employed; a general integer bijection<sup>11</sup>  $\{1 \dots pq\} \leftrightarrow \{1 \dots p\} \times \{1 \dots q\}$ ,  $l \leftrightarrow (i, j)$  may be utilized to formally derive the two-dimensional quadrature rule pairs

$$\underline{\xi}_l = (\xi_i, \eta_j), \quad w_l = w_i w_j, \quad l = 1 \dots pq \quad (2.19)$$

from their uniaxial counterparts.

**General quadrangular domain.** The rectangular infinitesimal area  $dA_{\xi\eta} = d\xi d\eta$  in the neighborhood of a  $\xi_P, \eta_P$  location, see Figure 2.2b, is mapped to the quadrangle of Figure 2.2a, which is composed by the two triangular areas

$$dA_{xy} = \frac{1}{2!} \begin{vmatrix} 1 & x(\xi_P, \eta_P) & y(\xi_P, \eta_P) \\ 1 & x(\xi_P + d\xi, \eta_P) & y(\xi_P + d\xi, \eta_P) \\ 1 & x(\xi_P, \eta_P + d\eta) & y(\xi_P, \eta_P + d\eta) \end{vmatrix} + \frac{1}{2!} \begin{vmatrix} 1 & x(\xi_P + d\xi, \eta_P + d\eta) & y(\xi_P + d\xi, \eta_P + d\eta) \\ 1 & x(\xi_P, \eta_P + d\eta) & y(\xi_P, \eta_P + d\eta) \\ 1 & x(\xi_P + d\xi, \eta_P) & y(\xi_P + d\xi, \eta_P) \end{vmatrix}. \quad (2.20)$$

<sup>11</sup> e.g.

$$\{i-1; j-1\} = (l-1) \bmod (p, q), \quad l-1 = (j-1)q + (i-1)$$

where the operator

$$\{a_n; \dots; a_3; a_2; a_1\} = m \bmod (b_n, \dots, b_3, b_2, b_1)$$

consists in the extraction of the  $n$  least significant  $a_i$  digits of a mixed radix representation of the integer  $m$  with respect to the sequence of  $b_i$  bases, with  $i = 1 \dots n$ .

The determinant formula for the area of a triangle, shown below along with its  $n$ -dimensional simplex hypervolume generalization,

$$\mathcal{A} = \frac{1}{2!} \begin{vmatrix} 1 & x_1 & y_1 \\ 1 & x_2 & y_2 \\ 1 & x_3 & y_3 \end{vmatrix}, \quad \mathcal{H} = \frac{1}{n!} \begin{vmatrix} 1 & \underline{x}_1 \\ 1 & \underline{x}_2 \\ \vdots & \vdots \\ 1 & \underline{x}_{n+1} \end{vmatrix} \quad (2.21)$$

has been employed above.

By operating a local multivariate linearization of the 2.20 matrix terms, the relation

$$\begin{aligned} dA_{xy} \approx & \frac{1}{2!} \begin{vmatrix} 1 & x & y \\ 1 & x + x_{,\xi}d\xi & y + y_{,\xi}d\xi \\ 1 & x + x_{,\eta}d\eta & y + y_{,\eta}d\eta \end{vmatrix} + \\ & + \frac{1}{2!} \begin{vmatrix} 1 & x + x_{,\xi}d\xi + x_{,\eta}d\eta & y + y_{,\xi}d\xi + y_{,\eta}d\eta \\ 1 & x + x_{,\eta}d\eta & y + y_{,\eta}d\eta \\ 1 & x + x_{,\xi}d\xi & y + y_{,\xi}d\xi \end{vmatrix} \end{aligned}$$

is obtained, where  $x, y, x_{,\xi}, x_{,\eta}, y_{,\xi}$ , and  $y_{,\eta}$  are the  $x, y$  functions and their first order partial derivatives, sampled at the  $(\xi_P, \eta_P)$  point; infinitesimal terms of order higher than  $d\xi, d\eta$  are neglected.

After some matrix manipulations<sup>12</sup>, the following expression is obtained

$$dA_{xy} = \begin{vmatrix} 1 & 0 & 0 \\ 0 & x_{,\xi} & y_{,\xi} \\ 0 & x_{,\eta} & y_{,\eta} \end{vmatrix} d\xi d\eta = \underbrace{\begin{vmatrix} x_{,\xi} & y_{,\xi} \\ x_{,\eta} & y_{,\eta} \end{vmatrix}}_{|J^T(\xi_P, \eta_P)|} dA_{\xi\eta} \quad (2.22)$$

that equates the ratio of the mapped and of the reference areas to the determinant of the transformation (transpose) Jacobian matrix<sup>13</sup>.

<sup>12</sup> For both the determinants, the first column is multiplied by  $x_P$  and subtracted to the second column, and then subtracted to the third column once multiplied by  $y_P$ . The first row is then subtracted to the others. On the second determinant alone, both the second and the third columns are changed in sign; then, the second and the third rows are summed to the first. The two determinants are now formally equal, and the two  $1/2$  multipliers are summed to provide unity. The  $d\xi$  and the  $d\eta$  factors may then be collected from the second and the third rows, respectively.

<sup>13</sup>The Jacobian matrix for a general  $\underline{\xi} \mapsto \underline{x}$  mapping is in fact defined according to

$$[J(\underline{\xi}_P)]_{ij} \stackrel{\text{def}}{=} \left. \frac{\partial x_i}{\partial \xi_j} \right|_{\underline{\xi}=\underline{\xi}_P} \quad i, j = 1 \dots n$$

being  $i$  the generic matrix term row index, and  $j$  the column index

After the preparatory passages above, we obtain

$$\iint_{A_{xy}} g(x, y) dA_{xy} = \iint_{-1}^1 g(x(\xi, \eta), y(\xi, \eta)) |J(\xi, \eta)| d\xi d\eta, \quad (2.23)$$

thus reducing the quadrature over a general domain to its reference domain counterpart, which has been discussed in the paragraph above.

Based on Eqn. 2.18, the quadrature rule

$$\iint_{A_{xy}} g(\underline{x}) dA_{xy} \approx \sum_{l=1}^{pq} g(\underline{x}(\underline{\xi}_l)) |J(\underline{\xi}_l)| w_l \quad (2.24)$$

is derived, stating that the definite integral of a  $g$  integrand over a quadrangular domain pertaining to the physical  $x, y$  plane ( $x, y$  are dimensional quantities, namely lengths) may be approximated as follows:

1. a reference-to-physical domain mapping is defined, that is based on the vertex physical coordinate interpolation;
2. the function is sampled at the physical locations that are the images of the Gaussian integration points previously obtained for the reference domain;
3. a weighted sum of the collected samples is performed, where the weights consist in the product of i) the adimensional  $w_l$  Gauss point weight (suitable for integrating on the reference domain), and ii) a dimensional area scaling term, that equals the determinant of the transformation Jacobian matrix, locally evaluated at the Gauss points.

## 2.2 Basic theory of plates

P displacement components as a function of the Q reference point motion.

$$u_P = u + z(1 + \tilde{\epsilon}_z) \sin \varphi \quad (2.25)$$

$$v_P = v - z(1 + \tilde{\epsilon}_z) \sin \theta \quad (2.26)$$

$$w_P = w + z((1 + \tilde{\epsilon}_z) \cos(\varphi) \cos(\theta) - 1) \quad (2.27)$$

$$\tilde{\epsilon}(z) = \frac{1}{z} \int_0^z \epsilon_z d\zeta \quad (2.28)$$

$$= \frac{1}{z} \int_0^z (-\nu \epsilon_x - \nu \epsilon_y) d\zeta \quad (2.29)$$

P displacement components as a function of the Q reference point motion, linearized with respect to the small rotations and small strain hypotheses.

$$u_P = u + z\varphi \quad (2.30)$$

$$v_P = v - z\theta \quad (2.31)$$

$$w_P = w \quad (2.32)$$

Relation between the normal displacement  $x, y$  gradient (i.e. the deformed plate slope), the rotations and the out-of-plane, interlaminar, averaged shear strain components.

$$\frac{\partial w}{\partial x} = \bar{\gamma}_{zx} - \varphi \quad (2.33)$$

$$\frac{\partial w}{\partial y} = \bar{\gamma}_{yz} + \theta \quad (2.34)$$

Strains at point P.

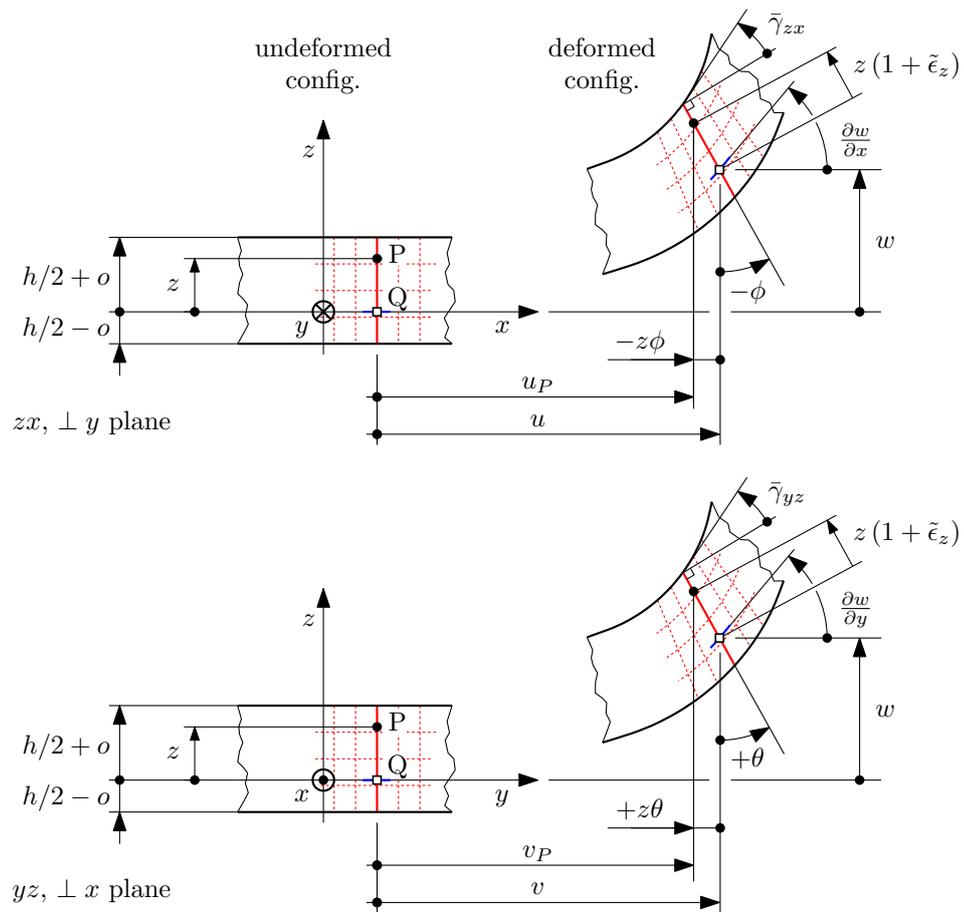


Figure 2.3: Relevant dimensions for describing the deformable plate kinematics.

$$\epsilon_x = \frac{\partial u_P}{\partial x} = \frac{\partial u}{\partial x} + z \frac{\partial \varphi}{\partial x} \quad (2.35)$$

$$\epsilon_y = \frac{\partial v_P}{\partial y} = \frac{\partial v}{\partial y} - z \frac{\partial \theta}{\partial y} \quad (2.36)$$

$$\gamma_{xy} = \frac{\partial u_P}{\partial y} + \frac{\partial v_P}{\partial x} \quad (2.37)$$

$$= \left( \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \right) + z \left( + \frac{\partial \varphi}{\partial y} - \frac{\partial \theta}{\partial x} \right) \quad (2.38)$$

Generalized plate strains: membrane strains.

$$\underline{\bar{\epsilon}} = \begin{pmatrix} \frac{\partial u}{\partial x} \\ \frac{\partial v}{\partial y} \\ \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \end{pmatrix} = \begin{pmatrix} \bar{\epsilon}_x \\ \bar{\epsilon}_y \\ \bar{\gamma}_{xy} \end{pmatrix} \quad (2.39)$$

Generalized plate strains: curvatures.

$$\underline{\kappa} = \begin{pmatrix} + \frac{\partial \varphi}{\partial x} \\ - \frac{\partial \theta}{\partial y} \\ + \frac{\partial \varphi}{\partial y} - \frac{\partial \theta}{\partial x} \end{pmatrix} = \begin{pmatrix} \kappa_x \\ \kappa_y \\ \kappa_{xy} \end{pmatrix} \quad (2.40)$$

Compact form for the strain components at P.

$$\underline{\epsilon} = \underline{\bar{\epsilon}} + z \underline{\kappa} \quad (2.41)$$

Hook law for an isotropic material, under plane stress conditions.

$$\underline{\underline{D}} = \frac{E}{1 - \nu^2} \begin{pmatrix} 1 & \nu & 0 \\ \nu & 1 & 0 \\ 0 & 0 & \frac{1-\nu}{2} \end{pmatrix} \quad (2.42)$$

Normal components for stress and strain, the latter for the isotropic material case only.

$$\sigma_z = 0 \quad (2.43)$$

$$\epsilon_z = -\nu (\epsilon_x + \epsilon_y) \quad (2.44)$$

Stresses at P.

$$\underline{\sigma} = \underline{\underline{D}} \underline{\epsilon} = \underline{\underline{D}} \underline{\bar{\epsilon}} + z \underline{\underline{D}} \underline{\kappa} \quad (2.45)$$

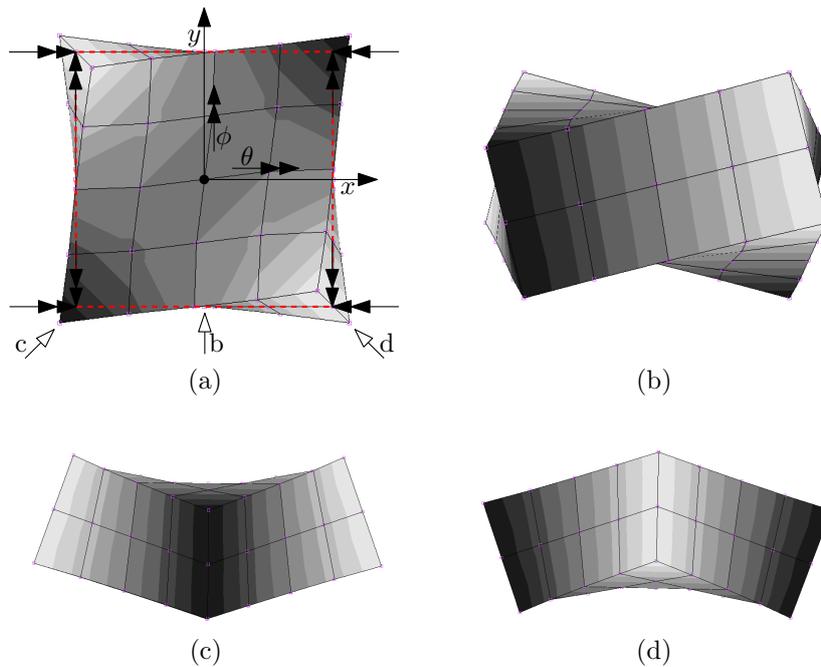


Figure 2.4: Positive  $\kappa_{xy}$  torsional curvature for the plate element. Subfigure (a) shows the positive  $\gamma_{xy}$  shear strain at the upper surface, the (in-plane) undeformed midsurface, and the negative  $\gamma_{xy}$  at the lower surface; the point of sight related to subfigures (b) to (d) are also evidenced.  $\theta$  and  $\phi$  rotation components decrease with  $x$  and increase with  $y$ , respectively, thus leading to positive  $\kappa_{xy}$  contributions. As shown in subfigures (c) and (d), the torsional curvature of subfigure (b) evolves into two anticlastic bending curvatures if the reference system is aligned with the square plate element diagonals, and hence rotated by  $45^\circ$  with respect to  $z$ .

Membrane (direct and shear) stress resultants (stress flows).

$$\underline{\mathbf{q}} = \begin{pmatrix} q_x \\ q_y \\ q_{xy} \end{pmatrix} = \int_h \underline{\sigma} dz \quad (2.46)$$

$$= \underbrace{\int_h \underline{\underline{\mathbf{D}}} dz}_{\underline{\underline{\mathbf{A}}}} \underline{\bar{\epsilon}} + \underbrace{\int_h \underline{\underline{\mathbf{D}}} z dz}_{\underline{\underline{\mathbf{B}}}} \underline{\kappa} \quad (2.47)$$

Bending and torsional moment stress resultants (moment flows).

$$\underline{\mathbf{m}} = \begin{pmatrix} m_x \\ m_y \\ m_{xy} \end{pmatrix} = \int_h \underline{\sigma} dz \quad (2.48)$$

$$= \underbrace{\int_h \underline{\underline{\mathbf{D}}} z dz}_{\underline{\underline{\mathbf{B}}} \equiv \underline{\underline{\mathbf{B}}}^T} \underline{\bar{\epsilon}} + \underbrace{\int_h \underline{\underline{\mathbf{D}}} z^2 dz}_{\underline{\underline{\mathbf{C}}}} \underline{\kappa} \quad (2.49)$$

Cumulative generalized strain - stress relations for the plate (or for the laminate)

$$\begin{pmatrix} \underline{\mathbf{q}} \\ \underline{\mathbf{m}} \end{pmatrix} = \begin{pmatrix} \underline{\underline{\mathbf{A}}} & \underline{\underline{\mathbf{B}}} \\ \underline{\underline{\mathbf{B}}}^T & \underline{\underline{\mathbf{C}}} \end{pmatrix} \begin{pmatrix} \underline{\bar{\epsilon}} \\ \underline{\kappa} \end{pmatrix} \quad (2.50)$$

Hook law for the orthotropic material in plane stress conditions, with respect to principal axes of orthotropy;

$$\underline{\underline{\mathbf{D}}}_{123} = \begin{pmatrix} \frac{E_1}{1-\nu_{12}\nu_{21}} & \frac{\nu_{21}E_1}{1-\nu_{12}\nu_{21}} & 0 \\ \frac{\nu_{12}E_2}{1-\nu_{12}\nu_{21}} & \frac{E_2}{1-\nu_{12}\nu_{21}} & 0 \\ 0 & 0 & G_{12} \end{pmatrix} \quad (2.51)$$

$$\begin{pmatrix} \sigma_1 \\ \sigma_2 \\ \tau_{12} \end{pmatrix} = \underline{\underline{\mathbf{T}}}_1 \begin{pmatrix} \sigma_x \\ \sigma_y \\ \tau_{xy} \end{pmatrix} \quad \begin{pmatrix} \epsilon_1 \\ \epsilon_2 \\ \gamma_{12} \end{pmatrix} = \underline{\underline{\mathbf{T}}}_2 \begin{pmatrix} \epsilon_x \\ \epsilon_y \\ \gamma_{xy} \end{pmatrix} \quad (2.52)$$

where

$$\underline{\underline{\mathbf{T}}}_1 = \begin{pmatrix} m^2 & n^2 & 2mn \\ n^2 & m^2 & -2mn \\ -mn & mn & m^2 - n^2 \end{pmatrix} \quad (2.53)$$

$$\underline{\underline{\mathbf{T}}}_2 = \begin{pmatrix} m^2 & n^2 & mn \\ n^2 & m^2 & -mn \\ -2mn & 2mn & m^2 - n^2 \end{pmatrix} \quad (2.54)$$

$\alpha$  is the angle between 1 and x;

$$m = \cos(\alpha) \quad n = \sin(\alpha) \quad (2.55)$$

The inverse transformations may be obtained based on the relations

$$\underline{\underline{\mathbf{T}}}_1^{-1}(+\alpha) = \underline{\underline{\mathbf{T}}}_1(-\alpha) \quad \underline{\underline{\mathbf{T}}}_2^{-1}(+\alpha) = \underline{\underline{\mathbf{T}}}_2(-\alpha) \quad (2.56)$$

Finally

$$\underline{\underline{\sigma}} = \underline{\underline{\mathbf{D}}} \underline{\underline{\epsilon}} \quad \underline{\underline{\mathbf{D}}} \equiv \underline{\underline{\mathbf{D}}}_{xyz} = \underline{\underline{\mathbf{T}}}_1^{-1} \underline{\underline{\mathbf{D}}}_{123} \underline{\underline{\mathbf{T}}}_2 \quad (2.57)$$

Notes:

- Midplane is ill-defined if the material distribution is not symmetric; the geometric midplane (i.e. the one obtained by ignoring the material distribution) exhibits no relevant properties in general. Its definition is nevertheless pretty straightforward.
- If the unsymmetric laminate is composed by isotropic layers, a reference plane may be obtained for which the  $\underline{\underline{\mathbf{B}}}$  membrane-to-bending coupling matrix vanishes; a similar condition may not be verified in the presence of orthotropic layers.
- Thermally induced distortion is not self-compensated in an unsymmetric laminate even if the temperature is held constant through the thickness.

## 2.3 The bilinear isoparametric shear-deformable shell element

This is a four-node, thick-shell element with global displacements and rotations as degrees of freedom. Bilinear interpolation is used for the coordinates, displacements and the rotations. The membrane strains are obtained from the displacement field; the curvatures from the rotation field. The transverse shear strains are calculated at the middle of the edges and interpolated to the integration points. In this way, a very efficient and simple element is obtained which exhibits correct behavior in the limiting case of thin shells. The element can be used in curved shell analysis as well as in the analysis of complicated plate structures. For the latter case, the element is easy to use since connections between intersecting plates can be modeled without tying. Due to its simple formulation when compared to the standard higher order shell elements, it is less expensive and, therefore, very attractive in nonlinear analysis. The element is not very sensitive to distortion, particularly if the corner nodes lie in the same plane. All constitutive relations can be used with this element.

— MSC.Marc 2013.1 Documentation, vol. B, Element library.

### 2.3.1 Element geometry

Once recalled the required algebraic paraphernalia, the definition of a bilinear quadrilateral shear-deformable isoparametric shell element is straightforward.

The quadrilateral element geometry is defined by the position in space of its four vertices, which constitute the set of *nodal points*, or *nodes*, i.e. the set of locations at which field components are primarily, parametrically, defined; interpolation is employed in deriving the field values elsewhere.

A suitable interpolation scheme, named *bilinear*, has been introduced in paragraph 2.1.1; the related functions depend on the normalized coordinate pair  $\xi, \eta \in [-1, 1]$  that spans the elementary quadrilateral of Figure 2.1.

A global reference system  $OXYZ$  is employed for concurrently dealing with multiple elements (i.e. at a whole model scale); a more convenient, local  $Cxyz$  reference system,  $z$  being locally normal to the shell, is used when a single element is under scrutiny – e.g. in the current paragraph.

Nodal coordinates define the element initial, undeformed, geometry<sup>14</sup> of the portion of shell reference surface pertaining to the current element; spatial coordinates for each other element point may be retrieved by interpolation based on the associated pair of natural  $\xi, \eta$  coordinates.

In particular, the  $C$  centroid is the image within the physical space of the  $\xi = 0, \eta = 0$  natural coordinate system origin.

The in-plane orientation of the local  $Cxyz$  reference system is somewhat arbitrary and implementation-specific; the MSC.Marc approach is used as an example, and it is described in the following. The in-plane  $x, y$  axes are tentatively defined<sup>15</sup> based on the physical directions that are associated with the  $\xi, \eta$  natural axes, i.e. the oriented segments spanning a) from the midpoint of the  $n4-n1$  edge to the midpoint of the  $n2-n3$  edge, and b) from the midpoint of the  $n1-n2$  edge to the midpoint of the  $n3-n4$  edge, respectively; however, these two tentative axes are not mutually orthogonal in general. The mutual  $Cxy$  angle is then amended by rotating those interim axes with respect to a third, binormal axis  $Cz$ , while preserving their initial bisectrix.

The resulting quadrilateral shell element is in fact initially flat, apart from a (suggestedly limited) anticlastic curvature of the element diagonals, that is associated to the quadratic  $\xi\eta$  term of the interpolation functions. The curve nature of a thin wall midsurface is thus represented by recurring to a plurality of basically flat, but mutually angled elements.

<sup>14</sup>They are however continuously updated within most common nonlinear analysis frameworks, where *initial* usually refers to the last computed, aka *previous* step of an iterative scheme.

<sup>15</sup>The MSC.Marc element library documentation defines them as a normalized form of the

$$\left( \frac{\partial X}{\partial \xi}, \frac{\partial Y}{\partial \xi}, \frac{\partial Z}{\partial \xi} \right) \Big|_{\xi=0, \eta=0}, \left( \frac{\partial X}{\partial \eta}, \frac{\partial Y}{\partial \eta}, \frac{\partial Z}{\partial \eta} \right) \Big|_{\xi=0, \eta=0},$$

vectors, which are evaluated at the centroid. The two definitions may be proved equivalent based on the bilinear interpolation properties.

### 2.3.2 Displacement and rotation fields

The element degrees of freedom consist in the displacements and the rotations of the four quadrilateral vertices, i.e. *nodes*.

By interpolating the nodal values, displacement and rotation functions may be derived along the element as

$$\begin{bmatrix} u(\xi, \eta) \\ v(\xi, \eta) \\ w(\xi, \eta) \end{bmatrix} = \sum_{i=1}^4 N_i(\xi, \eta) \begin{bmatrix} u_i \\ v_i \\ w_i \end{bmatrix} \quad (2.58)$$

$$\begin{bmatrix} \theta(\xi, \eta) \\ \varphi(\xi, \eta) \\ \psi(\xi, \eta) \end{bmatrix} = \sum_{i=1}^4 N_i(\xi, \eta) \begin{bmatrix} \theta_i \\ \varphi_i \\ \psi_i \end{bmatrix} \quad (2.59)$$

with  $i = 1 \dots 4$  cycling along the element nodes.

### 2.3.3 Strains

By recalling Eqn. 2.13, we have e.g.

$$\begin{bmatrix} \frac{\partial u}{\partial x} \\ \frac{\partial u}{\partial y} \end{bmatrix} = \underbrace{(\underline{\underline{J}}')^{-1} \begin{bmatrix} \dots & \frac{\partial N_i}{\partial \xi} & \dots \\ \dots & \frac{\partial N_i}{\partial \eta} & \dots \end{bmatrix}}_{\underline{\underline{L}}(\xi, \eta)} \begin{bmatrix} \vdots \\ u_i \\ \vdots \end{bmatrix} \quad (2.60)$$

for the  $x$ -oriented displacement component; the isoparametric differential operator  $\underline{\underline{L}}(\xi, \eta)$  is also defined that extract the  $x, y$  directional derivatives from the nodal values of a given field component.

We now collect within the five column vectors

$$\underline{\underline{u}} = \begin{bmatrix} \vdots \\ u_i \\ \vdots \end{bmatrix}, \quad \underline{\underline{v}} = \begin{bmatrix} \vdots \\ v_i \\ \vdots \end{bmatrix}, \quad \underline{\underline{w}} = \begin{bmatrix} \vdots \\ w_i \\ \vdots \end{bmatrix}, \quad \underline{\underline{\theta}} = \begin{bmatrix} \vdots \\ \theta_i \\ \vdots \end{bmatrix}, \quad \underline{\underline{\varphi}} = \begin{bmatrix} \vdots \\ \varphi_i \\ \vdots \end{bmatrix} \quad (2.61)$$

the nodal degrees of freedom; the  $\underline{\underline{\psi}}$  vector associated with the drilling degree of freedom is omitted.

A block defined  $Q(\xi, \eta)$  matrix is thus obtained that cumulatively relates the in-plane displacement component derivatives to the associ-

ated nodal values

$$\begin{bmatrix} \frac{\partial u}{\partial x} \\ \frac{\partial u}{\partial y} \\ \frac{\partial v}{\partial x} \\ \frac{\partial v}{\partial y} \end{bmatrix} = \underbrace{\begin{bmatrix} \underline{\underline{L}}(\xi, \eta) & \underline{\underline{0}} \\ \underline{\underline{0}} & \underline{\underline{L}}(\xi, \eta) \end{bmatrix}}_{\underline{\underline{Q}}(\xi, \eta)} \begin{bmatrix} \underline{\underline{u}} \\ \underline{\underline{v}} \end{bmatrix} \quad (2.62)$$

An equivalent relation may then be obtained for the rotation field

$$\begin{bmatrix} \frac{\partial \theta}{\partial x} \\ \frac{\partial \theta}{\partial y} \\ \frac{\partial \varphi}{\partial x} \\ \frac{\partial \varphi}{\partial y} \end{bmatrix} = \underline{\underline{Q}}(\xi, \eta) \begin{bmatrix} \underline{\underline{\theta}} \\ \underline{\underline{\varphi}} \end{bmatrix} \quad (2.63)$$

By making use of two auxiliary matrices  $H^\dagger$  and  $H^\ddagger$  that collect the  $\{0, \pm 1\}$  coefficients in Eqns. 2.39 and 2.40, we obtain

$$\begin{bmatrix} \bar{\epsilon}_x \\ \bar{\epsilon}_y \\ \bar{\gamma}_{xy} \end{bmatrix} = \underbrace{\begin{bmatrix} +1 & 0 & 0 & 0 \\ 0 & 0 & 0 & +1 \\ 0 & +1 & +1 & 0 \end{bmatrix}}_{\underline{\underline{H}}^\dagger} \begin{bmatrix} \frac{\partial u}{\partial x} \\ \frac{\partial u}{\partial y} \\ \frac{\partial v}{\partial x} \\ \frac{\partial v}{\partial y} \end{bmatrix} = \underline{\underline{H}}^\dagger \underline{\underline{Q}}(\xi, \eta) \begin{bmatrix} \underline{\underline{u}} \\ \underline{\underline{v}} \end{bmatrix} \quad (2.64)$$

$$\begin{bmatrix} \kappa_x \\ \kappa_y \\ \kappa_{xy} \end{bmatrix} = \underbrace{\begin{bmatrix} 0 & 0 & +1 & 0 \\ 0 & -1 & 0 & 0 \\ -1 & 0 & 0 & +1 \end{bmatrix}}_{\underline{\underline{H}}^\ddagger} \begin{bmatrix} \frac{\partial \theta}{\partial x} \\ \frac{\partial \theta}{\partial y} \\ \frac{\partial \varphi}{\partial x} \\ \frac{\partial \varphi}{\partial y} \end{bmatrix} = \underline{\underline{H}}^\ddagger \underline{\underline{Q}}(\xi, \eta) \begin{bmatrix} \underline{\underline{\theta}} \\ \underline{\underline{\varphi}} \end{bmatrix} \quad (2.65)$$

The in plane strain tensor at each  $\xi, \eta, z$  point along the element may then be derived according to Eqn. 2.41 as a (linear) function of the nodal degrees of freedom

$$\underline{\underline{\epsilon}}(\xi, \eta, z) = \begin{bmatrix} \underline{\underline{H}}^\dagger \underline{\underline{Q}}(\xi, \eta) & \underline{\underline{0}} & z \underline{\underline{H}}^\ddagger \underline{\underline{Q}}(\xi, \eta) \end{bmatrix} \begin{bmatrix} \underline{\underline{u}} \\ \underline{\underline{v}} \\ \underline{\underline{w}} \\ \underline{\underline{\theta}} \\ \underline{\underline{\varphi}} \end{bmatrix} \quad (2.66)$$

where the transformation matrix is block-defined by appending to the 3x8 block introduced in Eqn. 2.64 a 3x3 zero block (the  $\underline{w}$  out-of-plane displacements have no influence on the in-plane strain components), and then the 3x8 block presented in Eqn. 2.65.

By separating the terms of the above matrix based on their order with respect to  $z$ , we finally have.

$$\underline{\epsilon}(\xi, \eta, z) = (\underline{\mathbf{B}}_0(\xi, \eta) + \underline{\mathbf{B}}_1(\xi, \eta)z) \underline{\mathbf{d}} \quad (2.67)$$

The out-of-plane shear strain components, as defined in Eqns. 2.33 and 2.34, become

$$\begin{bmatrix} \bar{\gamma}_{zx} \\ \bar{\gamma}_{yz} \end{bmatrix} = \underline{\mathbf{L}}(\xi, \eta) \underline{\mathbf{w}} + \begin{bmatrix} 0 & +\underline{\mathbf{N}}(\xi, \eta) \\ -\underline{\mathbf{N}}(\xi, \eta) & 0 \end{bmatrix} \begin{bmatrix} \underline{\theta} \\ \underline{\varphi} \end{bmatrix}, \quad (2.68)$$

and thus, by employing a notation consistent with 2.67,

$$\begin{bmatrix} \bar{\gamma}_{zx} \\ \bar{\gamma}_{yz} \end{bmatrix} = \underbrace{\begin{bmatrix} \underline{\mathbf{0}} & \underline{\mathbf{0}} & \underline{\mathbf{L}}(\xi, \eta) & -\underline{\mathbf{N}}(\xi, \eta) & \underline{\mathbf{N}}(\xi, \eta) \\ & & & & 0 \end{bmatrix}}_{\underline{\mathbf{B}}_{\bar{\gamma}}(\xi, \eta)} \underline{\mathbf{d}} \quad (2.69)$$

where the transformation matrix that derives the out-of-plane, inter-laminar strains from the nodal degrees of freedom vector is constituted by five  $2 \times 4$  blocks.

### 2.3.4 Stresses

The plane stress relations discussed in Paragraph 2.2, see Eqns. 2.43, may be employed in deriving the in-plane stress components from the associated strains.

The  $G_{zx}, G_{yz}$  material shear moduli relate the out-of-plane shear stresses to the associated strain components only if the latter are assumed constant along the thickness, and thus equal to the average values  $\bar{\gamma}_{zx}, \bar{\gamma}_{yz}$ . A gross approximation, this, that may be overcome by extending the Jourawsky equilibrium considerations introduced for beams, to the plate realm. The actual treatise is however both complicated and, still, inexact<sup>16</sup>.

In the case of homogeneous, linearly elastic plate material, an energetically consistent material law for the out-of-plane shear may be obtained by scaling the pointwise stress/strain relation<sup>17</sup>

$$\begin{bmatrix} \tau_{zx} \\ \tau_{yz} \end{bmatrix} = \underline{\underline{D}} \gamma \begin{bmatrix} \gamma_{zx} \\ \gamma_{yz} \end{bmatrix}, \quad (2.70)$$

by a  $6/5$  factor, thus obtaining the emended, average out-of-plane shear stress components

$$\begin{bmatrix} \bar{\tau}_{zx} \\ \bar{\tau}_{yz} \end{bmatrix} = \underbrace{\left( \frac{6}{5} \underline{\underline{D}} \gamma \right)}_{\underline{\underline{D}}_\gamma} \begin{bmatrix} \bar{\gamma}_{zx} \\ \bar{\gamma}_{yz} \end{bmatrix}, \quad (2.71)$$

Such relation is energetically consistent in the sense of the following equality

$$\frac{1}{2} \int_z \gamma_{zx} \tau_{zx} + \gamma_{yz} \tau_{yz} dz = \frac{1}{2} \begin{bmatrix} \bar{\gamma}_{zx} \\ \bar{\gamma}_{yz} \end{bmatrix}^\top \begin{bmatrix} \bar{\tau}_{zx} \\ \bar{\tau}_{yz} \end{bmatrix} h \quad (2.72)$$

$$= \frac{1}{2} \begin{bmatrix} \bar{\gamma}_{zx} \\ \bar{\gamma}_{yz} \end{bmatrix}^\top \underline{\underline{D}}_\gamma \begin{bmatrix} \bar{\gamma}_{zx} \\ \bar{\gamma}_{yz} \end{bmatrix} h. \quad (2.73)$$

<sup>16</sup>See e.g. MSC.Marc 2013.1 Documentation, Vol. A, pp. 433-436

<sup>17</sup>As an example, the definition for  $\underline{\underline{D}}_\gamma$  in the case of an orthotropic material whose out-of-plane shear moduli are  $G_{z1}$  and  $G_{2z}$  is

$$\underline{\underline{D}}_\gamma = \begin{bmatrix} n^2 G_{z1} + m^2 G_{2z} & mn G_{z1} - mn G_{2z} \\ mn G_{z1} - mn G_{2z} & m^2 G_{z1} + n^2 G_{2z} \end{bmatrix},$$

where  $m = \cos \alpha$ ,  $n = \sin \alpha$ , and  $\alpha$  is the angle between the first in-plane principal direction of ortotropy, namely 1, and the local  $x$  axis.

The definition of the  $\underline{\underline{D}}_\gamma$  matrix for composite laminates, or in the case of nonlinear material behaviour, is Beyond the Scope of the Present Contribution (BSPC).

### 2.3.5 The element stiffness matrix.

In this paragraph, the elastic behaviour of the finite element under scrutiny is derived.

The element is considered in its deformed configuration, being

$$\underline{\underline{d}}^\top = [\underline{\underline{u}}^\top \quad \underline{\underline{v}}^\top \quad \underline{\underline{w}}^\top \quad \underline{\underline{\theta}}^\top \quad \underline{\underline{\varphi}}^\top] \quad (2.74)$$

the Degree of Freedom (DOF) vector associated with such condition.

A virtual displacement field perturbs such deformed configuration; as usual, those virtual displacements are infinitesimal, they do occur while time is held constant, and, being otherwise arbitrary, they respect the existing kinematic constraints.

Whilst, in fact, no external constraints are applied to the element, the motion of the pertaining material points is prescribed based on a) the assumed plate kinematics, and b) on the bilinear, isoparametric interpolation laws that propagate the generalized nodal displacements  $\delta \underline{\underline{d}}$  towards the quadrilateral’s interior.

Since the element is supposed to elastically react to such deformed configuration, a set of external actions

$$\underline{\underline{F}}^\top = [\underline{\underline{U}}^\top \quad \underline{\underline{V}}^\top \quad \underline{\underline{W}}^\top \quad \underline{\underline{\Theta}}^\top \quad \underline{\underline{\Phi}}^\top] \quad (2.75)$$

is applied at nodes<sup>18</sup> – one each DOF, that equilibrate the stretched element reactions.

The nature of each  $\underline{\underline{F}}$  generalized force component is defined based on the nature of the associated generalized displacement, such that the overall virtual work they perform on any  $\delta \underline{\underline{d}}$  motion is

$$\delta Q_e = \delta \underline{\underline{d}}^\top \underline{\underline{F}}. \quad (2.76)$$

The in-plane stress components that are induced by the  $\underline{\underline{d}}$  generalized displacements equal

$$\underline{\underline{\sigma}} = \underline{\underline{D}}(z) (\underline{\underline{B}}_0(\xi, \eta) + \underline{\underline{B}}_1(\xi, \eta)z) \underline{\underline{d}} \quad (2.77)$$

---

<sup>18</sup>There is no lack of generality in assuming the equilibrating external actions applied at DOFs only, as discussed in Par. XXX below.

according to the previous paragraphs. They perform (volumic) internal work on the

$$\delta \underline{\underline{\epsilon}} = (\underline{\underline{\mathbf{B}}}_0(\xi, \eta) + \underline{\underline{\mathbf{B}}}_1(\xi, \eta)z) \delta \underline{\underline{\mathbf{d}}} \quad (2.78)$$

virtual elongations.

The associate internal virtual work may be derived by integration along the element volume, i.e. along the thickness, and along the quadrilateral portion of reference surface that pertains to the element. We thus obtain a first contribution to the overall internal virtual work

$$\begin{aligned} \delta Q_i^\sigma &= \iint_{\mathcal{A}} \int_h \delta \underline{\underline{\epsilon}}^\top \underline{\underline{\sigma}} dz d\mathcal{A} \\ &= \iint_{\mathcal{A}} \int_h ((\underline{\underline{\mathbf{B}}}_0 + \underline{\underline{\mathbf{B}}}_1 z) \delta \underline{\underline{\mathbf{d}}})^\top \underline{\underline{\mathbf{D}}} (\underline{\underline{\mathbf{B}}}_0 + \underline{\underline{\mathbf{B}}}_1 z) \underline{\underline{\mathbf{d}}} dz d\mathcal{A} \\ &= \delta \underline{\underline{\mathbf{d}}}^\top \left[ \iint_{\mathcal{A}} \int_h (\underline{\underline{\mathbf{B}}}_0^\top + \underline{\underline{\mathbf{B}}}_1^\top z) \underline{\underline{\mathbf{D}}} (\underline{\underline{\mathbf{B}}}_0 + \underline{\underline{\mathbf{B}}}_1 z) dz d\mathcal{A} \right] \underline{\underline{\mathbf{d}}} \\ &= \delta \underline{\underline{\mathbf{d}}}^\top \underline{\underline{\mathbf{K}}}_\sigma \underline{\underline{\mathbf{d}}} \end{aligned} \quad (2.79)$$

Integration along i) the reference surface, and ii) along the thickness is numerically performed through potentially distinct quadrature rules; in particular, contributions are collected along the surface according to the two points per axis (four points overall) Gaussian quadrature formula introduced in Par. 2.1.2, whilst a (composite) Simpson rule is applied in  $z$ , being each material layer sampled at its outer and middle points.

The two points per axis quadrature rule is the lowest order rule that returns an exact integral evaluation in the case of *distortion-free*<sup>19</sup> elements, i.e. planar elements whose peculiar (parallelogram) shape also determines a linear (vs. bilinear) isoparametric mapping. Since the associated Jacobian matrix is constant with respect to  $\xi, \eta$ , the  $\underline{\underline{\mathbf{L}}}$  matrix defined in 2.60 linearly varies with such isoparametric coordinates, and so do the  $\underline{\underline{\mathbf{B}}}_0, \underline{\underline{\mathbf{B}}}_1$  matrices. The integrand of Eqn. 2.79 is thus a quadratic function of the  $\xi, \eta$  integration variables, as the Jacobian matrix determinant that scales the physical and the natural infinitesimal areas is also constant XXX.

<sup>19</sup>Many distinct definitions are associated to the element distortion concept, being the one reported relevant for the specific dissertation passage.

A second contribution, which is due to the out-of-plane shear components, may be obtained with similar considerations, and based on Eqns. 2.69 and 2.73; such contribution may be cast as

$$\begin{aligned}
 \delta Q_i^\gamma &= \iint_{\mathcal{A}} \int_h \delta \bar{\gamma}^\top \bar{\tau} dz d\mathcal{A} \\
 &= \delta \underline{\mathbf{d}}^\top \left[ h \iint_{\mathcal{A}} \underline{\mathbf{B}}_\gamma^\top \underline{\mathbf{D}}_\gamma \underline{\mathbf{B}}_\gamma d\mathcal{A} \right] \underline{\mathbf{d}} \\
 &= \delta \underline{\mathbf{d}}^\top \underline{\mathbf{K}}_\gamma \underline{\mathbf{d}}.
 \end{aligned} \tag{2.80}$$

The overall internal work is thus

$$\begin{aligned}
 \delta Q_i &= \delta Q_i^\sigma + \delta Q_i^\gamma \\
 &= \delta \underline{\mathbf{d}}^\top (\underline{\mathbf{K}}_\sigma + \underline{\mathbf{K}}_\gamma) \underline{\mathbf{d}} \\
 &= \delta \underline{\mathbf{d}}^\top \underline{\mathbf{K}} \underline{\mathbf{d}}.
 \end{aligned} \tag{2.81}$$

The principle of virtual works states that the external and the internal virtual works are equal for a general virtual displacement  $\delta \underline{\mathbf{d}}$ , namely

$$\delta \underline{\mathbf{d}}^\top \underline{\mathbf{F}} = \delta Q_e = \delta Q_i = \delta \underline{\mathbf{d}}^\top \underline{\mathbf{K}} \underline{\mathbf{d}}, \quad \forall \delta \underline{\mathbf{d}}, \tag{2.82}$$

if and only if the applied external actions  $\underline{\mathbf{F}}$  are in equilibrium with the elastic reactions due to the displacements  $\underline{\mathbf{d}}$ ; the following equality thus holds

$$\underline{\mathbf{F}} = \underline{\mathbf{K}} \underline{\mathbf{d}}; \tag{2.83}$$

the  $\underline{\mathbf{K}}$  *stiffness matrix* relates a deformed element configuration, which is defined the the generalized displacement vector  $\underline{\mathbf{d}}$ , with the  $\underline{\mathbf{F}}$  generalized forces that have to be applied at the element nodes to keep the element in such a stretched state.

### 2.3.6 The shear locking flaw

Figure 2.5 rationalizes the shear locking phenomenon that plagues the bilinear isoparametric element in its mimicking the pure bending deformation modes, with both in-plane and out-of-plane constant curvature.

An ingenious sampling and interpolation technique has been developed in [2] that overcomes the locking effect due to the spurious transverse shear strain that develops when the element is subject to out-of-plane bending. Such technique, however, does not correct the element behaviour with respect to in-plane bending.

Eqn. 2.69 is employed in obtaining the transverse shear strain components  $\bar{\gamma}_{zx}$  and  $\bar{\gamma}_{yz}$  at the edge midpoints; the edge-aligned component  $\bar{\gamma}_{z\hat{i}j}$  is derived by projection along the  $\hat{i}j$  direction, whereas the orthogonal component is neglected.

Figure 2.6a evidences that a null spurious transverse shear is measured at the midpoint of the 12 and of the 41 edges when a constant, out-of-plane curvature is locally enforced that develops along the  $\hat{1}2$  and the  $\hat{4}1$  directions, respectively. Such property holds for all edges.

In Figure 2.6b, a differential out-of-plane displacement is added to the initial pure bending configuration of Fig. 2.6a, and in the absence of further rotations at nodes; a proper (vs. spurious) transverse shear strain field is thus induced in the element, that the sampling scheme should properly evaluate.

The edge aligned, transverse shear components sampled at the side midpoints are then assigned to the whole edge, and in particular to both its extremal nodes.

As shown in Figure 2.6b (and in the related enlarged view), two independent transverse shear components  $\bar{\gamma}_{z\hat{1}2}$  and  $\bar{\gamma}_{z\hat{4}1}$  are associated to the n1 node, which is taken as an example.

A vector is uniquely determined, whose projections on the  $\hat{1}2$  and  $\hat{4}1$  directions coincide with the associated transverse shear components; the components of such vector with respect to the  $x, y$  axes define the  $\bar{\gamma}_{zx, n1}$  and  $\bar{\gamma}_{yz, n1}$  transverse shear terms at the n1 node.

Such procedure is repeated for all the element vertices; the obtained nodal values for the transverse shear components are then interpolated to the element interior, according to the customary bilinear scheme.

Due to the peculiarity of the initial sampling points, the obtained transverse shear strain field is amended with respect to the spurious

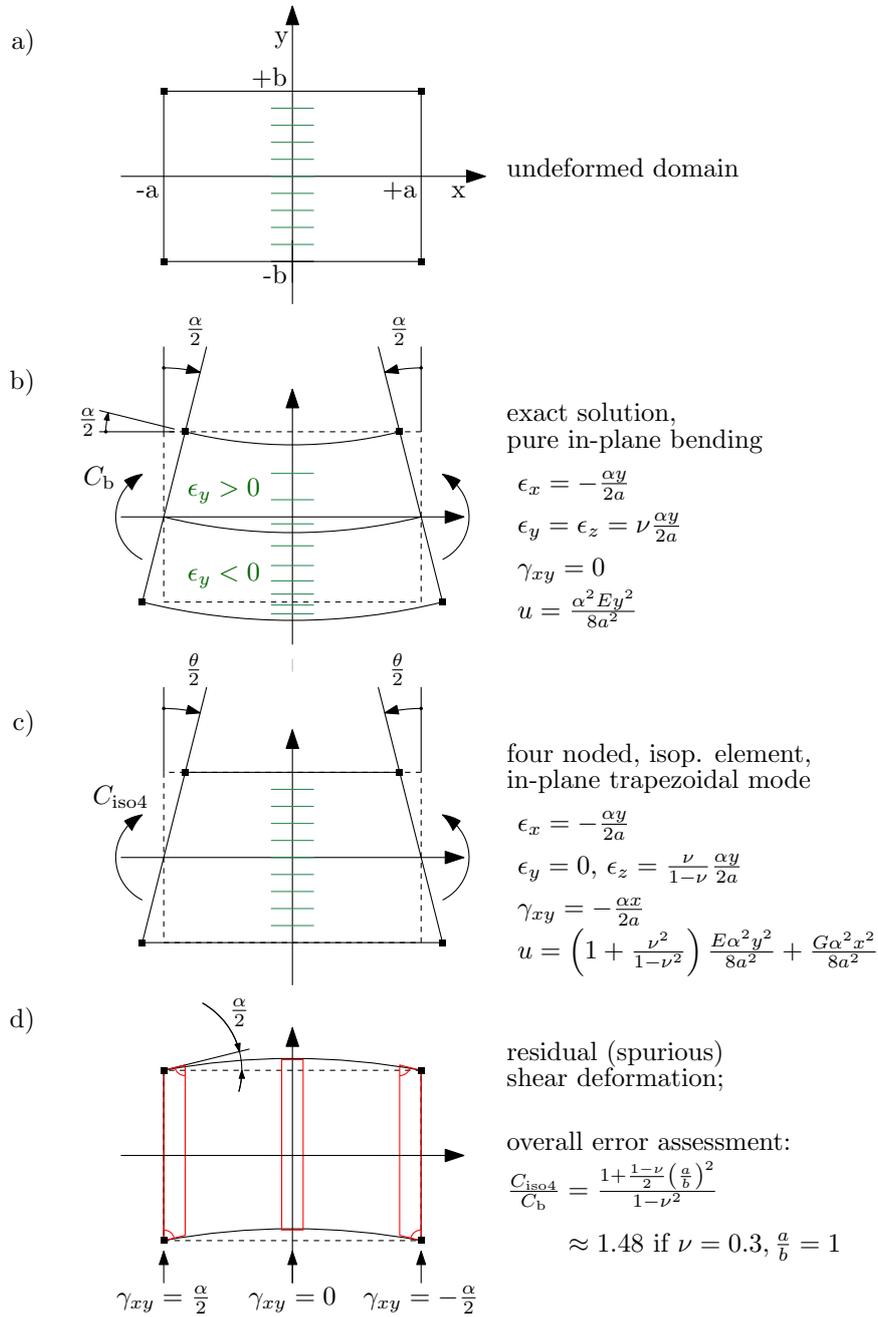


Figure 2.5: Rationalization of the shear locking phenomenon.

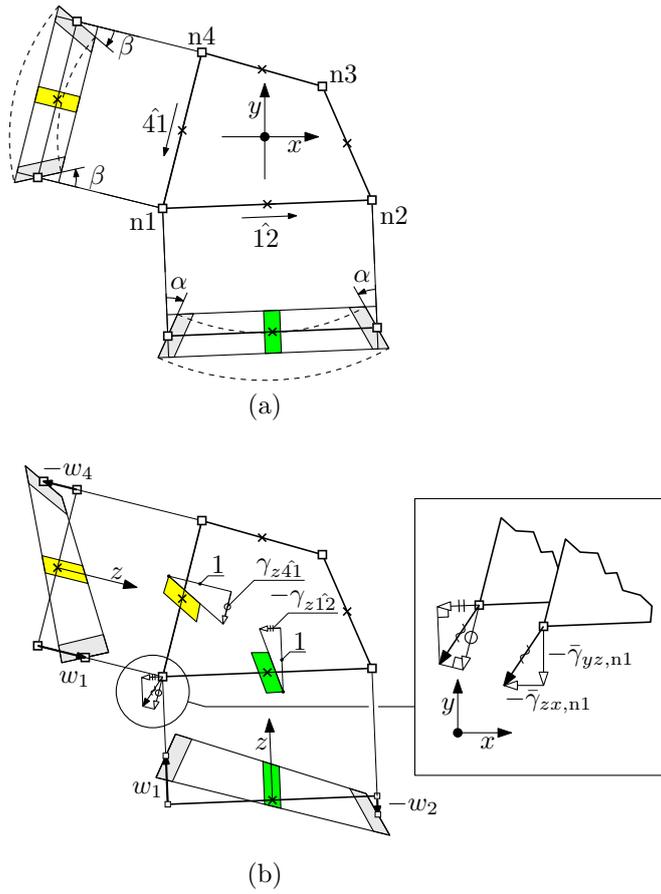


Figure 2.6: A transverse shear sampling technique employed in the four-noded isoparametric element for preventing shear locking in the out-of-plane plate bending.

contribution that previously led to the shear locking effect; the usual quadrature scheme may now be employed.

Equation 2.69 still formalizes the passage from nodal DOFs to the out-of-plane shear field, since the procedure described in the present paragraph may be easily cast in the form of a revised  $\underline{\underline{B}}_\gamma$  matrix.

## 2.4 Joining elements into structures.

### 2.4.1 Displacement and rotation field continuity

Displacement and rotation fields are continuous at the isoparametric quadrilateral inter-element interfaces; they are in fact continuous at nodes since the associated nodal DOFs are shared by adjacent elements, and the field interpolations that occur within each quadrilateral domain a) they both reduce to the same linear relation along the shared edge, and b) they are performed in the absence of any contributions related to unshared nodes.

### 2.4.2 Expressing the element stiffness matrix in terms of global DOFs

As seen in Par. 2.3.5, the stiffness matrix of each  $j$ -th element defines the elastic relation between the associated generalized forces and displacements, i.e.

$$\underline{\mathbf{F}}_{ej} = \underline{\mathbf{K}}_{ej} \underline{\mathbf{d}}_{ej} \quad (2.84)$$

where the DOFs definition is local with respect to the element under scrutiny.

In order to investigate the mutual interaction between elements in a structure, a common set of *global* DOFs is required; in particular, generalized displacement DOFs are defined at each  $l$ -th global node, i.e., for nodes interacting with the shell element formulation under scrutiny,

$$\underline{\mathbf{d}}_{gl} = \begin{bmatrix} u_{gl} \\ v_{gl} \\ w_{gl} \\ \theta_{gl} \\ \varphi_{gl} \\ \psi_{gl} \end{bmatrix}. \quad (2.85)$$

The global reference system  $OXYZ$  is typically employed in projecting nodal vector components. However, each  $l$ -th global node may be supplied with a specific reference system, whose unit vectors are  $\hat{i}_{gl}, \hat{j}_{gl}, \hat{k}_{gl}$ , thus permitting the employment of non uniformly aligned (e.g. cylindrical) global reference systems.

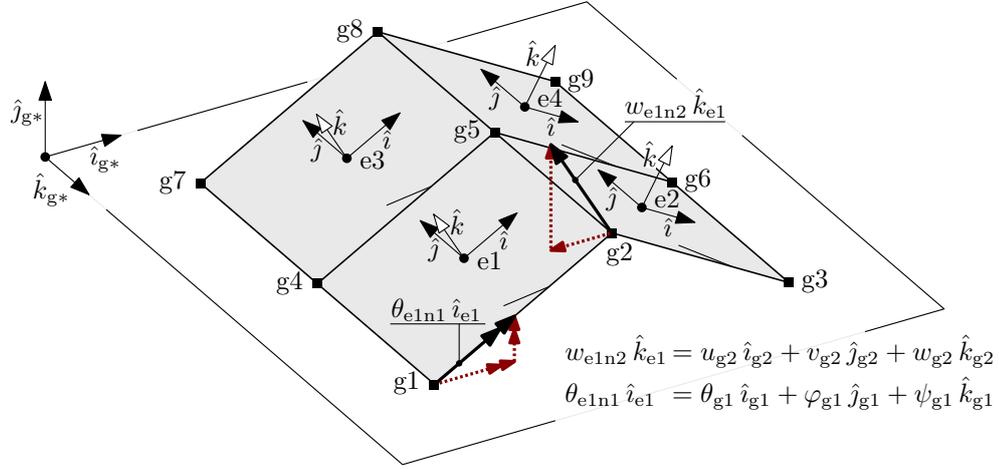


Figure 2.7: A simple four-element, roof-like structure employed in discussing the assembly procedures. The elements are square, thick plates whose angle with respect to the global  $XY$  plane is  $30^\circ$

Those nodal degrees of freedom may be collected in a global DOFs vector

$$\underline{\mathbf{d}}_g^\top = [\underline{\mathbf{d}}_{g1}^\top \quad \underline{\mathbf{d}}_{g2}^\top \quad \dots \quad \underline{\mathbf{d}}_{gl}^\top \quad \dots \quad \underline{\mathbf{d}}_{gn}^\top] \quad (2.86)$$

that parametrically defines any deformed configuration of the structure.

Analogously, a global, external (generalized<sup>20</sup>) forces vector may be defined, that assumes the form

$$\underline{\mathbf{F}}_g^\top = [\underline{\mathbf{F}}_{g1}^\top \quad \underline{\mathbf{F}}_{g2}^\top \quad \dots \quad \underline{\mathbf{F}}_{gl}^\top \quad \dots \quad \underline{\mathbf{F}}_{gn}^\top]; \quad (2.87)$$

since external constraints are expected to be applied to the structure DOFs, the following vector of reaction forces

$$\underline{\mathbf{R}}_g^\top = [\underline{\mathbf{R}}_{g1}^\top \quad \underline{\mathbf{R}}_{g2}^\top \quad \dots \quad \underline{\mathbf{R}}_{gl}^\top \quad \dots \quad \underline{\mathbf{R}}_{gn}^\top] \quad (2.88)$$

is introduced.

<sup>20</sup>Unless otherwise specified, the *displacement* and *force* terms refer to the DOFs, and the suitable actions that perform work with their variation, respectively. They are in fact *generalized* forces and displacements.




Figure 2.8: A representation of the stiffness matrix terms for each element in the example structure; the term magnitude is represented through a linear grayscale, spanning from zero (white) to the peak value (black).

The simple four element, roof-like structure of Fig. 2.7 is employed in the following to discuss the procedure that derives the elastic response characterization for the structure from its elemental counterparts.

The structure comprises nine nodes, whose location in space is defined according to a global reference system  $OXYZ$ , see Table XXX. The structure is composed by four, identical, four noded isoparametric shell elements, whose formulation is described in the preceding section 2.3.

A grayscale, normalized representation of the element stiffness matrix is shown in Figure 2.8.

XXX

The rectangular  $\underline{\underline{P}}_{ej}$  mapping matrix rows are mutually orthogonal, thus leading to the relations

$$\underline{\underline{P}}_{ej}^\top \underline{\underline{P}}_{ej} = \underline{\underline{I}}_{24} \tag{2.89}$$

$$\underline{\underline{P}}_{ej} \underline{\underline{P}}_{ej}^\top = \text{diag}(\alpha_k), \alpha_k \in \{1, 0\}, k = 1 \dots N \tag{2.90}$$

where  $\alpha_k$  equals unity if the  $k$ -th structure DOF pertains to a node to which the  $j$ -th element is attached, and zero otherwise.

XXX

The contribution of the  $j$ -th element to the elastic response of the structure may thus be described as the vector of global force compo-

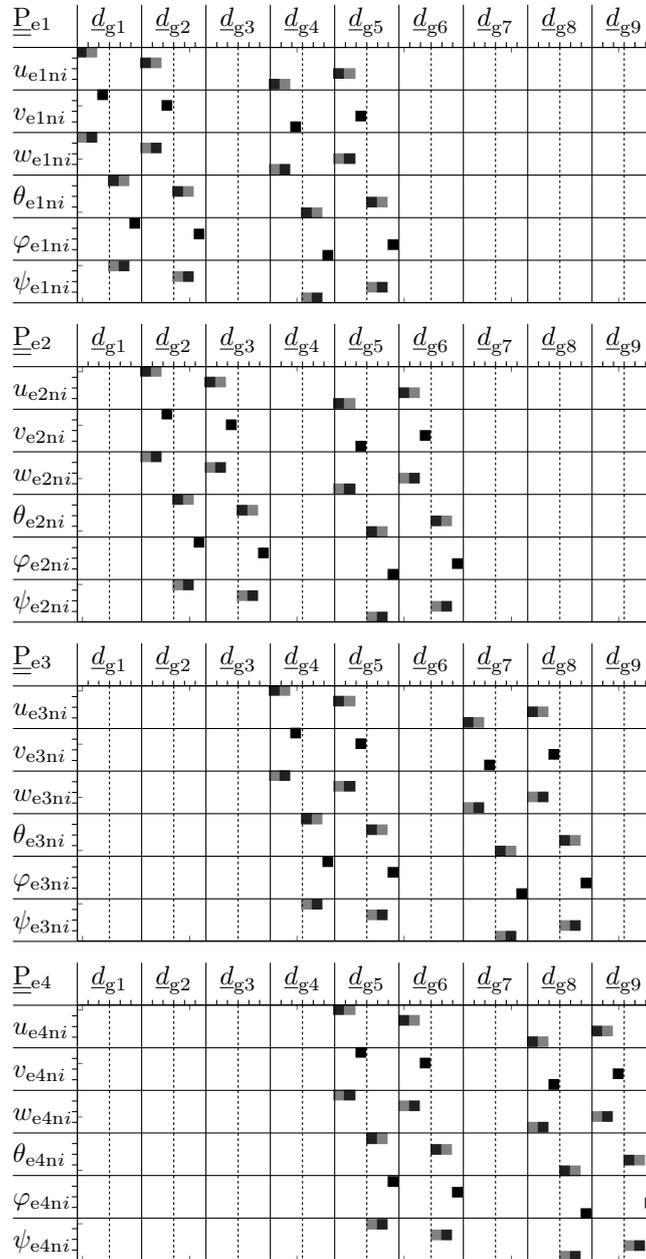


Figure 2.9: A grayscale representation of the terms of the four  $\underline{\underline{P}}_{e_j}$  mapping matrices associated the elements of Fig. 2.7.

nents

$$\underline{\underline{F}}_{g \leftarrow e_j} = \underline{\underline{P}}_{e_j}^\top \underline{\underline{K}}_{e_j} \underline{\underline{P}}_{e_j} \underline{\underline{d}}_g; \quad (2.91)$$

such external actions are the ones to be applied at the structure DOFs in order to equilibrate the elastic reactions that arise at the element nodes, if a deformed configuration is prescribed for the latter according to the  $\underline{\underline{d}}_g$  global displacement mode.

By accumulating the contribution for the various elements in a structure, the overall relation is obtained

$$\underline{\underline{F}}_g = \sum_j \underline{\underline{F}}_{g \leftarrow e_j} = \left( \sum_j \underline{\underline{P}}_{e_j}^\top \underline{\underline{K}}_{e_j} \underline{\underline{P}}_{e_j} \right) \underline{\underline{d}}_g = \underline{\underline{K}}_g \underline{\underline{d}}_g, \quad (2.92)$$

that defines the  $\underline{\underline{K}}_g$  global stiffness matrix as an assembly of the elemental contribution. The contribute accumulation at the summatory steps is graphically represented in Fig. 2.10, in the case of the example structure of Fig. 2.7.

The global stiffness matrix is symmetric, and it shows nonzero terms at cells whose row and column indices are associate to two DOFs that are bridged by a direct elastic link – i.e., an element exists, that insists on both the nodes those DOFs pertain; since only a limited number of elements insist on each given node, the matrix is sparse, as shown in Fig. 2.10d.

An favourable numbering of the global nodes may be searched for, such that the nonzero terms are clustered within a (possibly) narrow band around the diagonal; the resulting stiffness matrix is hence *banded*, condition this that reduces both the storage requirements, and the computational effort in applying the various algebraic operators to the matrix.

The stiffness matrix (half-)bandwidth may be predicted by evaluating the bandwidth required for storing each element contribution

$$b_{e_j} = (i_{\max} - i_{\min} + 1)l, \quad (2.93)$$

and retaining the

$$b = \max_{e_j} b_{e_j} \quad (2.94)$$

peak value; in the formula 2.93,  $l$  is the number of DOF per element node, whereas  $i_{\max}$  and  $i_{\min}$  are the extremal integer labels associated to the element nodes, according to the global numbering.

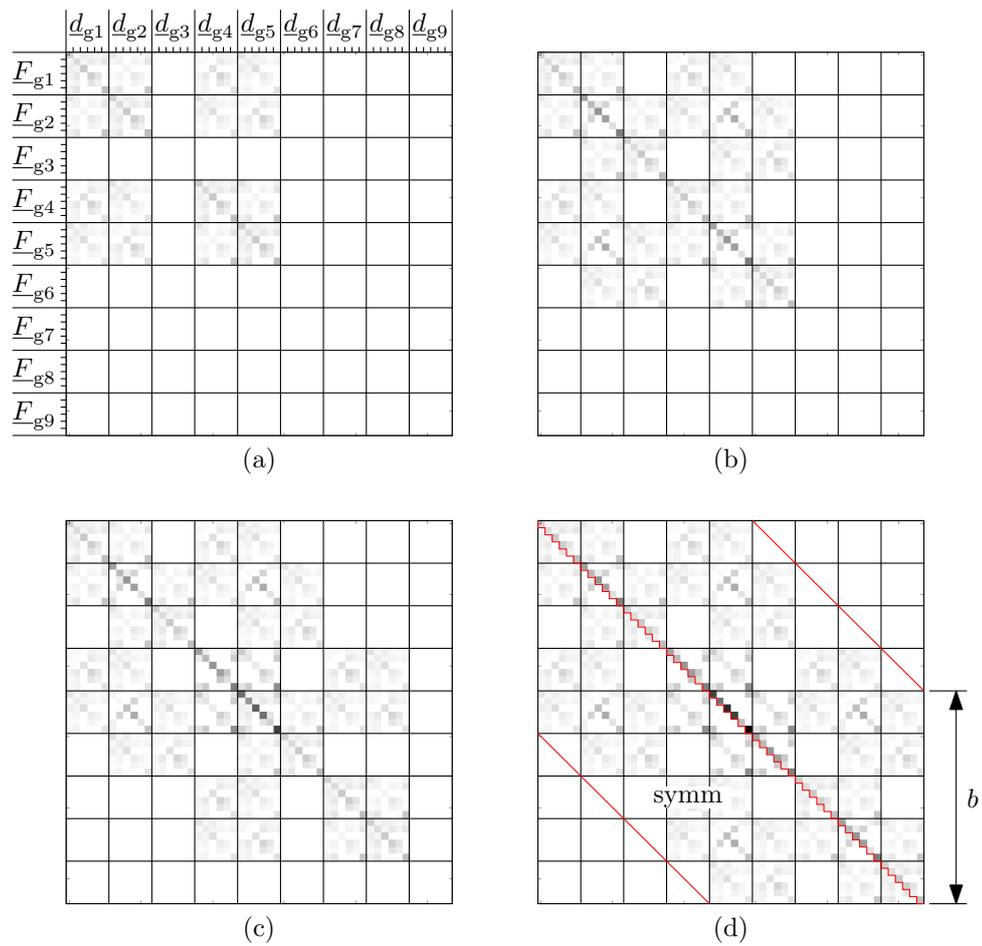


Figure 2.10: Graphical representation of the assembly steps for the stiffness matrix of the Fig. 2.7 structure. The zero-initialized form for the matrix that precedes the (a) step is omitted.

## 2.5 External forces

Energetically consistent external actions may be applied at the nodal DOFs, that may be interpreted as *concentrated* forces and moments; their physical rationalization outside the discretized structure framework – and in particular back to the underlying elastic continua theory – is far from being trivial.

Surface tractions and volumetric loads are instead naturally tied with the continuum formulation, and are usually employed in formalizing the load condition of structural components.

The present paragraph derives the equivalent nodal representation of distributed actions acting on the domain of a single finite element; the inverse relation provides a finite, distributed traction counterpart to concentrated actions applied at the nodes of a discretized FE model.

The  $\underline{\underline{S}}$  set of elementary deformation modes that is introduced in the context of the element mass matrix derivation, see Eqn. 2.120, is employed to define a virtual displacement field within the element domain based on the virtual variation  $\delta \underline{\underline{d}}_e$  of its nodal DOFs values, i.e.

$$\delta \underline{\underline{u}}(\xi, \eta, z) = \underline{\underline{S}}(\xi, \eta, z) \delta \underline{\underline{d}}_e, \quad (2.95)$$

see also Eq. 2.121.

A volumetric external load is considered, whose components  $\underline{\underline{q}} = [q_x, q_y, q_z]$  are consistent with the  $\underline{\underline{S}}$  matrix reference system, i.e. the local to the element, physical *Cxyz* one. If external load components are defined in the context of a global reference system, straightforward reference frame transformations are to be applied.

The virtual work performed by those distributed actions is first integrated along the element domain, and then equalled to its nodal counterpart  $\delta \underline{\underline{d}}_e^\top \underline{\underline{F}}_e$ , thus leading to

$$\begin{aligned} \delta \underline{\underline{d}}_e^\top \underline{\underline{F}}_e &= \iiint_{\Omega} (\delta \underline{\underline{u}})^\top \underline{\underline{q}} d\Omega \\ &= \iiint_{\Omega} (\underline{\underline{S}} \delta \underline{\underline{d}}_e)^\top \underline{\underline{q}} d\Omega \\ &= \delta \underline{\underline{d}}_e^\top \iiint_{\Omega} \underline{\underline{S}}^\top \underline{\underline{q}} d\Omega, \end{aligned}$$

and finally to

$$\underline{\mathbf{F}}_e = \iiint_{\Omega} \underline{\mathbf{S}}^T \underline{\mathbf{q}} d\Omega \quad (2.96)$$

due to the general nature of  $\delta \underline{\mathbf{d}}$ .

The quadrature along the domain is performed according to the methods introduced for deriving the element stiffness matrix. If a surface or an edge load are supplied in place of the volumetric load vector  $\underline{\mathbf{q}}$ , equation 2.96 integral may be adapted to span each loaded element face, or edge.

The element vector forces are then accumulated to derive global external forces vector  $\underline{\mathbf{F}}_g$ , as in

$$\underline{\mathbf{F}}_g = \sum_j \underline{\mathbf{P}}_{ej}^T \underline{\mathbf{F}}_{ej}; \quad (2.97)$$

the transposed  $\underline{\mathbf{P}}_{ej}^T$  mapping matrix is employed to translate the actions on the local DOFs to their global counterpart.

In the case of low order isoparametric elements – e.g. the four-noded quadrilateral shell element, an alternative, simplified procedure for the consolidation of the distributed loads into nodal forces becomes viable. According to such procedure, the element is split into influence volumes, one each node; XXX

## 2.6 Constraints.

### 2.6.1 An introductory example

xxx

### 2.6.2 General formulation

A set of  $m$  constraints

$$d_j = \sum_{d_i \in \underline{\mathbf{d}}_R} \lambda_{ji} d_i + \Delta_j \quad (2.98)$$

is defined that states the linear<sup>21</sup> dependence of a partition subset of the  $\underline{\mathbf{d}}$  DOFs vector terms, the *tied* ones, on the remaining  $d_i$  terms, that

<sup>21</sup>more precisely, *linear variation* dependence, due to the presence of the inhomogeneous term.

retain their independent nature. The independent terms are collected within a reduced cardinality DOF vector  $\underline{d}_R$ , and they are referred to as the *retained* ones<sup>22</sup>.

Also the inhomogeneous  $\Delta_j$  term is provided for in Eqn. 2.98 to accommodate constraints of the nonzero fixed displacement kind.

The following algebraic relation may then be derived, that defines the initial, unabridged  $\underline{d}$  DOF vector terms based on the subset that produces the retained DOF vector  $\underline{d}_R$

$$\underline{d} = \underline{\underline{A}} \underline{d}_R + \underline{\underline{\Delta}}; \quad (2.99)$$

the  $\underline{\underline{\Delta}}$   $n$ -sized column vector collects the various  $\Delta_j$  terms of the 2.98 constraint equations, and the  $n$  rows,  $n - m$  columns  $\underline{\underline{A}}$  matrix collects

- the identity relations between corresponding retained DOFs terms that appear in both  $\underline{d}$  and  $\underline{d}_R$ , and
- the  $\lambda_{ji}$  coefficients that define the linear variation dependence of the tied  $d_j$  DOF on the retained  $d_i$  DOF.

XXX

---

<sup>22</sup> Here, the definition of the overall, retained, and tied DOF vectors, ( $\underline{d}$ ,  $\underline{d}_R$ ,  $\underline{d}_T = \underline{d} - \underline{d}_R$ , respectively) is overloaded with both its DOF and DOF index (ordered) set counterparts, thus allowing e.g. the  $d_i \in \underline{d}_R$  notation in a vector element context, and the  $i \in \underline{d}_R$  notation in an integer index context.

### 2.6.3 Rigid body link RBE2

A master (or retained, control, independent, etc.)  $C$  node is considered, whose coordinates are defined as  $x_C, y_C, z_C$  in a (typically) global reference system, along with a set of  $n$   $P_i$  nodes whose coordinates are  $x_i, y_i, z_i$ .

A kinematic link is to be established such that the DOFs – or a subset of them – associated to the  $P_i$  nodes follow the rototranslations of the  $C$  control according to the rigid body motion laws.

In the case of a fully constrained  $P_i$  node we have

$$\begin{bmatrix} u_i \\ v_i \\ w_i \\ \theta_i \\ \phi_i \\ \psi_i \end{bmatrix} = \underbrace{\begin{bmatrix} 1 & 0 & 0 & 0 & +(z_i - z_C) & -(y_i - y_C) \\ 0 & 1 & 0 & -(z_i - z_C) & 0 & +(x_i - x_C) \\ 0 & 0 & 1 & +(y_i - y_C) & -(x_i - x_C) & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}}_{\underline{\underline{U}}_i} \begin{bmatrix} u_C \\ v_C \\ w_C \\ \theta_C \\ \phi_C \\ \psi_C \end{bmatrix} \quad (2.100)$$

where  $u, v, w$  ( $\theta, \phi, \psi$ ) are the translation (rotation) vector components with respect to the  $x, y, z$  cartesian reference system. A subset of the above DOF dependency relations may be cast to obtain a partial constraining of the  $P_i$  node; a free relative motion of such node with respect to the rigid body is allowed at the unconstrained DOFs.

External actions that are applied to tied  $P_i$  DOFs are reduced to the master node in form of a statically equivalent counterpart; the contributions deriving from each  $P_i$  node are finally accumulated.

### 2.6.4 Distributed load / averaged motion link RBE3

YYY

Si considera un nodo dipendente  $C$  di coordinate  $x_C, y_C, z_C$ , detto nodo di controllo (alle forze... altrimenti la definizione è impropria), ed una nuvola di  $n$  nodi indipendenti  $P_i$  di coordinate  $x_i, y_i, z_i$  e con peso relativo assegnato  $q_i$ .

Si considera applicato al nodo  $C$  un sistema di azioni esterne nella forma delle tre componenti di forza  $U_C, V_C, W_C$  e nelle tre componenti di momento  $\Omega_C, \Phi_C, \Psi_C$ , riunite nel vettore

$$\underline{\underline{F}}_C = [ U_C \ V_C \ W_C \ \Omega_C \ \Phi_C \ \Psi_C ]^T$$

Si definisce un centro di massa  $G$  della nuvola di punti, le cui coordinate sono al solito

$$x_G = \frac{\sum_i q_i x_i}{\sum_i q_i}, \quad y_G = \frac{\sum_i q_i y_i}{\sum_i q_i}, \quad z_G = \frac{\sum_i q_i z_i}{\sum_i q_i}. \quad (2.101)$$

Si suppone inoltre che il sistema di riferimento  $Gxyz$  sia **principale d'inerzia** per la distribuzione di pesi; nel caso tale ipotesi non sia verificata occorre procedere come segue:

- cambio di sistema di riferimento da terna  $xyz$  ad una terna ausiliaria  $\xi\eta\zeta$  con orientazione principale d'inerzia per la specifica distribuzione RBE3;
- applicazione della procedura sotto descritta utilizzando posizioni nodali e componenti di forza/momento scomposte secondo la terna ausiliaria  $\xi\eta\zeta$  in luogo della predefinita  $xyz$ ;
- trasformazione inversa delle quantità risultanti da terna ausiliaria  $\xi\eta\zeta$  a terna originale  $xyz$ .

Si definisce quindi una prima relazione di dipendenza cinematica, per cui le rototraslazioni

$$\underline{\delta}_C = [u_C \ v_C \ w_C \ \theta_C \ \phi_C \ \psi_C]^T$$

di  $C$  sui tre assi  $x, y, z$  sono definite in funzione delle rototraslazioni

$$\underline{\delta}_G = [u_G \ v_G \ w_G \ \theta_G \ \phi_G \ \psi_G]^T$$

del centro di massa  $G$  secondo il vincolo di rototraslazione rigida

$$\begin{bmatrix} u_C \\ v_C \\ w_C \\ \theta_C \\ \phi_C \\ \psi_C \end{bmatrix} = \underbrace{\begin{bmatrix} 1 & 0 & 0 & 0 & +(z_C - z_G) & -(y_C - y_G) \\ 0 & 1 & 0 & -(z_C - z_G) & 0 & +(x_C - x_G) \\ 0 & 0 & 1 & +(y_C - y_G) & -(x_C - x_G) & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}}_{\underline{\mathbb{L}}_{CG}} \cdot \begin{bmatrix} u_G \\ v_G \\ w_G \\ \theta_G \\ \phi_G \\ \psi_G \end{bmatrix} \quad (2.102)$$

già visto per le RBE2.

Tale relazione cinematica può essere imposta solo su un sottoinsieme dei gg.d.l. associati al nodo  $C$ , lasciando svincolati (e indipendenti) i restanti.

Come osservato al paragrafo (??), all'imposizione di tali relazioni cinematiche è associata una riduzione a nuovo punto di applicazione  $G$  delle azioni agenti su  $C$ , con l'introduzione di opportuni momenti di trasporto come da

$$\underline{F}_G = [\underline{L}_{CG}]^T \cdot \underline{F}_C, \quad \underline{F}_G = [U_G \ V_G \ W_G \ \Theta_G \ \Phi_G \ \Psi_G]^T \quad (2.103)$$

Tale vincolo deriva dall'imposizione di pari lavoro *virtuale* dei sistemi di forze su  $C$  e su  $G$

$$\mathcal{L}_C = \underline{\delta}_C^T \underline{F}_C = (\underline{L}_{CG} \underline{\delta}_G)^T \underline{F}_C = \underline{\delta}_G^T \underbrace{\underline{L}_{CG}^T \underline{F}_C}_{\underline{F}_G} = \underline{\delta}_G^T \underline{F}_G = \mathcal{L}_G \quad (2.104)$$

Si definisce quindi una seconda relazione di dipendenza per cui da una parte lo spostamento del nodo  $G$  risulti la media pesata degli spostamenti ai nodi  $P_i$ , ovvero

$$u_G = \frac{\sum_i q_i u_i}{\sum_i q_i}, \quad v_G = \frac{\sum_i q_i v_i}{\sum_i q_i}, \quad w_G = \frac{\sum_i q_i w_i}{\sum_i q_i}, \quad (2.105)$$

e dall'altra le forze applicate in  $C$  e ridotte a  $G$  si distribuiscano ai nodi  $P_i$  secondo i pesi dati, ossia

$$U'_i = U_G \frac{q_i}{\sum_i q_i}, \quad V'_i = V_G \frac{q_i}{\sum_i q_i}, \quad W'_i = W_G \frac{q_i}{\sum_i q_i}. \quad (2.106)$$

Per quanto riguarda la distribuzione dei momenti ridotti a  $G$  sui nodi  $P_i$ , si preferisce operare in termini di una seconda quota di forze nodali  $U''_i, V''_i, W''_i$  piuttosto che in termini di quote momento  $\Theta'_i, \Phi'_i, \Psi'_i$ .

Riferendosi a Figura 2.11, si considerano le componenti di momento  $\Theta_G, \Phi_G, \Psi_G$  singolarmente nella riduzione a sistemi di forze equivalenti.

Preso l'esempio particolare della componente  $z$  di momento  $\Psi_G$ , ad essa viene sostituito un sistema equivalente di forze  $\underline{F}_{\Psi,i}$  distribuite ai punti  $P_i$  in sole componenti  $x, y$  tali da avere

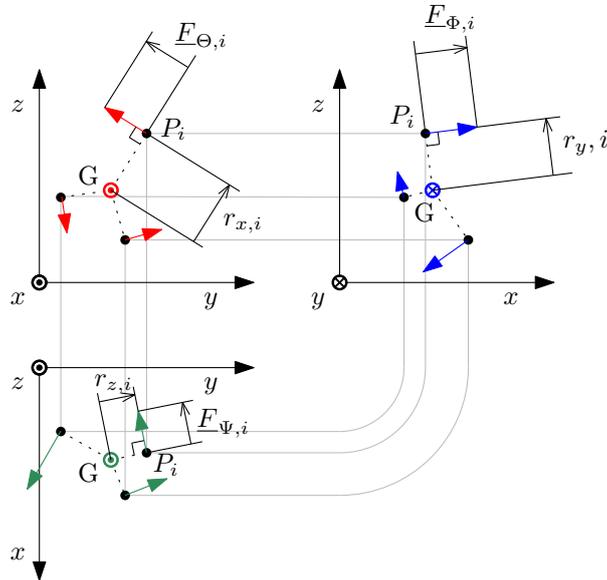


Figure 2.11: Schema distribuzione momenti

- retta d'azione sul piano  $x, y$ , normale alla congiungente  $G - P_i$  ivi proiettata
- verso coerente con il momento stesso
- modulo proporzionale alla distanza proiettata

$$r_{z,i} = \sqrt{\Delta x_i^2 + \Delta y_i^2}, \quad \Delta x_i = x_i - x_G, \quad \Delta y_i = y_i - y_G \quad (2.107)$$

e al peso  $q_i$  del nodo

- momento risultante della distribuzione pari a  $\Psi_G \hat{k}$

In particolare risulta

$$\underline{F}_{\Psi,i} = \frac{\Psi_G q_i}{\sum_j q_j r_{z,j}^2} (-\Delta y_i \hat{i} + \Delta x_i \hat{j}) \quad (2.108)$$

e, una volta definiti

$$r_{x,i} = \sqrt{\Delta y_i^2 + \Delta z_i^2}, \quad r_{y,i} = \sqrt{\Delta z_i^2 + \Delta x_i^2}, \quad \Delta z_i = z_i - z_G$$

si hanno per le altre componenti di momento le forme

$$\underline{F}_{\Theta,i} = \frac{\Theta_G q_i}{\sum_j q_j r_{z,j}^2} (-\Delta z_i \hat{j} + \Delta y_i \hat{k}), \quad (2.109)$$

$$\underline{F}_{\Phi,i} = \frac{\Phi_G q_i}{\sum_j q_j r_{y,j}^2} (-\Delta x_i \hat{k} + \Delta z_i \hat{i}) \quad (2.110)$$

le quali, raccolte per componenti e in notazione più compatta, danno

$$U_i'' \hat{i} + V_i'' \hat{j} + W_i'' \hat{k} = q_i \begin{bmatrix} \hat{i} & \hat{j} & \hat{k} \\ \frac{\Theta_G}{\sum_j q_j r_{x,j}^2} & \frac{\Phi_G}{\sum_j q_j r_{y,j}^2} & \frac{\Psi_G}{\sum_j q_j r_{z,j}^2} \\ \Delta x_i & \Delta y_i & \Delta z_i \end{bmatrix} \quad (2.111)$$

I termini in (2.111) andranno sommati a quelli ricavati in (2.106), per cui la forza distribuita dal link RBE3 sull' $i$ -esimo nodo risulterà

$$\underline{F}_i = U_i \hat{i} + V_i \hat{j} + W_i \hat{k} = (U_i' + U_i'') \hat{i} + (V_i' + V_i'') \hat{j} + (W_i' + W_i'') \hat{k} \quad (2.112)$$

o, in forma algebrica

$$\begin{bmatrix} U_i \\ V_i \\ W_i \end{bmatrix} = q_i \underbrace{\begin{bmatrix} \frac{1}{\sum_j q_j} & 0 & 0 & 0 & + \frac{\Delta z_i}{\sum_j q_j r_{y,j}^2} & - \frac{\Delta y_i}{\sum_j q_j r_{z,j}^2} \\ 0 & \frac{1}{\sum_j q_j} & 0 & - \frac{\Delta z_i}{\sum_j q_j r_{x,j}^2} & 0 & + \frac{\Delta x_i}{\sum_j q_j r_{z,j}^2} \\ 0 & 0 & \frac{1}{\sum_j q_j} & + \frac{\Delta y_i}{\sum_j q_j r_{x,j}^2} & - \frac{\Delta x_i}{\sum_j q_j r_{y,j}^2} & 0 \end{bmatrix}}_{\underline{L}_{GP,i}^T} \begin{bmatrix} U_G \\ V_G \\ W_G \\ \Theta_G \\ \Phi_G \\ \Psi_G \end{bmatrix} \quad (2.113)$$

$$\Theta_i = \Phi_i = \Psi_i = 0 \quad (2.114)$$

Tale relazione è definita in forma specifica per ogni nodo  $P_i$ .

Alla distribuzione di forza appena descritta è associata la forma agli spostamenti

$$\underline{\delta}_G = \underbrace{\left[ \underline{L}_{GP,1} \quad \cdots \quad \underline{L}_{GP,i} \quad \cdots \quad \underline{L}_{GP,n} \right]}_{\underline{L}_{GP}} \underbrace{\begin{bmatrix} u_1 \\ v_1 \\ w_1 \\ u_2 \\ \vdots \\ v_n \\ w_n \end{bmatrix}}_{\underline{\delta}_{vi}} \quad (2.115)$$

ove  $\underline{\underline{L}}_{GP}$  è definita per blocchi. Tale forma agli spostamenti definisce il moto del baricentro  $G$  in funzione del moto dei punti della distribuzione; a titolo di esempio lo spostamento  $u_G$  risulta definito dall'Eq. (2.115) come

$$u_G = \frac{\sum_i q_i \langle [1, 0, 0], [u_i, v_i, w_i] \rangle}{\sum_i q_i} \quad (2.116)$$

mentre la rotazione  $\psi_G$  risulta definita come

$$\psi_G = \frac{\sum_i q_i \langle [-\Delta y_i, +\Delta x_i, 0], [u_i, v_i, w_i] \rangle}{\sum_i q_i r_{z,i}^2} \quad (2.117)$$

ove  $\langle \cdot, \cdot \rangle$  è il consueto prodotto scalare.

Ambo le forme risultano riconducibili ad una proiezione pesata e normalizzata degli spostamenti dei nodi indipendenti  $P_i$  su forme di moto elementari della distribuzione di punti, ad esempio una traslazione  $x$  come in (2.116) o una rotazione  $(G, z)$  come in (2.117). Si può inoltre notare che i numeratori delle (2.116) e (2.117) sono forme integrate nel tempo della quantità di moto e del momento della quantità di moto della distribuzione<sup>23</sup>, mentre i denominatori sono rispettivamente una massa e un momento d'inerzia.

Ricordando infine la (2.102) si può infine esprimere per il link RBE3 una condizione cinematica complessiva

$$\underline{\underline{\delta}}_c = \underline{\underline{L}}_{CG} \cdot \underline{\underline{L}}_{GP} \cdot \underline{\underline{\delta}}_{\forall i} \quad (2.118)$$

ed una caratteristica di distribuzione delle forze ai nodi  $P_i$

$$\underline{\underline{F}}_i = \underline{\underline{L}}_{GP,i}^T \cdot \underline{\underline{L}}_{CG}^T \cdot \underline{\underline{F}}_C, \quad i = 1 \dots n. \quad (2.119)$$

<sup>23</sup>Tali quantità sono integrate da una condizione iniziale scarica/indeformata ad una condizione finale sollecitata/deformata; appaiono infatti gli spostamenti nodali al posto delle velocità nodali.

## 2.7 Mass matrix for the finite element

### 2.7.1 Energy consistent formulation for the mass matrix

The  $\Omega$  volume of material associated to a finite element is considered, along with the local, physical reference system  $(x, y, z)$ , and its isoparametric counterpart that, for the quadrilateral plate element under scrutiny, is embodied by the  $(\xi, \eta, z)$  triad.

The *vector* shape function array

$$\underline{\underline{S}}(\xi, \eta, z) = \begin{bmatrix} \dots & \tilde{u}_i(\xi, \eta, z) & \dots \\ \dots & \tilde{v}_i(\xi, \eta, z) & \dots \\ \dots & \tilde{w}_i(\xi, \eta, z) & \dots \end{bmatrix} \quad (2.120)$$

is defined based on the elementary motions  $\tilde{\underline{u}}_i \equiv [\tilde{u}_i, \tilde{v}_i, \tilde{w}_i]^\top$  induced to the element material points by imposing a unit value to the  $i$ -th degree of freedom  $d_i$ , while keeping the others fixed.

The displacement field is then defined as a linear combination of the elementary motions above, where the  $\underline{\underline{d}} \equiv \underline{\underline{d}}_e$  element DOFs serve as coefficients, namely

$$\underline{\underline{u}}(\xi, \eta, z) = \underline{\underline{S}}(\xi, \eta, z) \underline{\underline{d}}. \quad (2.121)$$

Deriving with respect to time the equation above, the velocity field

$$\dot{\underline{\underline{u}}}(\xi, \eta, z) = \underline{\underline{S}}(\xi, \eta, z) \dot{\underline{\underline{d}}} \quad (2.122)$$

is obtained as a function of the first variation in time of element DOFs. Expression 2.122 is simplified by the constant-in-time nature of  $\underline{\underline{S}}$ .

The kinetic energy contribution associated to the deformable element material points may be integrated, thus obtaining

$$E_{\text{kin}} = \frac{1}{2} \iiint_{\Omega} \dot{\underline{\underline{u}}}^\top \dot{\underline{\underline{u}}} \rho d\Omega \quad (2.123)$$

where  $\rho$  is the material mass density, that may vary across the domain. By substituting the velocity field definition of Eq. 2.122 we obtain

$$E_{\text{kin}} = \frac{1}{2} \iiint_{\Omega} [\underline{\underline{S}} \dot{\underline{\underline{d}}}]^\top [\underline{\underline{S}} \dot{\underline{\underline{d}}}] \rho d\Omega, \quad (2.124)$$

and finally

$$E_{\text{kin}} = \frac{1}{2} \underline{\dot{\mathbf{d}}}^\top \left[ \iiint_{\Omega} \underline{\mathbf{S}}^\top \underline{\mathbf{S}} \rho d\Omega \right] \underline{\dot{\mathbf{d}}} = \frac{1}{2} \underline{\dot{\mathbf{d}}}^\top \underline{\mathbf{M}} \underline{\dot{\mathbf{d}}}. \quad (2.125)$$

The integral term that defines the  $\underline{\mathbf{M}}$  mass matrix is evaluated by resorting to the same quadrature technique introduced for its stiffness counterpart.

The actual nature of the mass matrix terms varies based on the type of the DOFs that are associated to the term row and column; in particular, the diagonal terms that are related to displacements and rotations are dimensionally consistent with a mass and a moment of inertia, respectively.

The mass matrix quantifies the inertial response of the finite element; according to its definition

$$\underline{\mathbf{M}} = \iiint_{\Omega} \underline{\mathbf{S}}^\top \underline{\mathbf{S}} \rho d\Omega, \quad (2.126)$$

it is merely a function of the material density, and of the kinematic laws that constrain the motion of the material particles within the element.

If a set of external (generalized) forces  $\underline{\mathbf{F}}$  is applied to the element DOFs in the fictitious absence of elastic reactions, a purely inertial response is expected. The  $\underline{\dot{\mathbf{d}}}$  vector defines the instantaneous first derivative in time of the DOFs (i.e. nodal translational and rotational velocities); the instantaneous power supplied by the external forces is then evaluated as  $\underline{\dot{\mathbf{d}}}^\top \underline{\mathbf{F}}$ , that induces an equal time derivative of the kinetic energy, quantified as <sup>24</sup>

$$\begin{aligned} \underline{\dot{\mathbf{d}}}^\top \underline{\mathbf{F}} &= \frac{dE_{\text{kin}}}{dt} = \frac{d}{dt} \left( \frac{1}{2} \underline{\dot{\mathbf{d}}}^\top \underline{\mathbf{M}} \underline{\dot{\mathbf{d}}} \right) \\ &= \frac{1}{2} \left( \underline{\ddot{\mathbf{d}}}^\top \underline{\mathbf{M}} \underline{\dot{\mathbf{d}}} + \underline{\dot{\mathbf{d}}}^\top \underline{\mathbf{M}} \underline{\ddot{\mathbf{d}}} \right) \\ &= \underline{\dot{\mathbf{d}}}^\top \underline{\mathbf{M}} \underline{\ddot{\mathbf{d}}}. \end{aligned}$$

<sup>24</sup>The symmetric matrix characterizing property

$$\underline{\mathbf{x}}^\top \underline{\mathbf{A}} \underline{\mathbf{y}} = \underline{\mathbf{y}}^\top \underline{\mathbf{A}} \underline{\mathbf{x}} \quad \forall \underline{\mathbf{x}}, \underline{\mathbf{y}} \in \mathbb{R}^n$$

is used in deriving the last passage.

Due to the general nature of  $\underline{\dot{d}}$ , equality

$$\underline{F} = \underline{M} \underline{\ddot{d}} \quad (2.127)$$

is implied, which points out the mass matrix role in transforming the DOF vector second derivative in time (i.e. nodal translational and rotational accelerations) into the generalized force components that are to be applied in order to sustain such variation of motion.

### 2.7.2 Lumped mass matrix formulation

In a few applications, a diagonal form for the mass matrix is preferred at the expense of a) a strict adherence to energy consistency, and b) some arbitrariness in its definition.

The finite element volume is ideally partitioned into a set of influence domains, one each node. In the case of the four-noded quadrilateral, material points whose  $\xi, \eta$  isoparametric coordinates fall within the first, second, third and fourth quadrant are associated to nodes n3, n4, n1 and n2, respectively; those distributed masses are then ideally accumulated at the associated node.

A group of four concentrated nodal masses is thus defined, whose motion is defined based on single translational DOFs, and not on the plurality of weighted contributions that induces the nonzero, nondiagonal terms at the consistent mass matrix.

This undue material accumulation at the element periphery produces a spurious increase of the moment of inertia, condition, this, that may only be worsened if (positive) rotational inertias are introduced at nodes.

Those nodal rotational inertias are however required in associating a bounded angular acceleration to unbalanced nodal torques; solution methods based on the mass matrix inversion, e.g. explicit dynamic procedures, are precluded otherwise. Since there is no consensus on the quantification those inertial terms, the reader is addressed to specialized literature.

## 2.8 Advanced modeling tools

### 2.8.1 Inertia relief

Inertia relief<sup>25</sup> refers to an analysis procedure that allows unconstrained systems – or systems otherwise susceptible to stress-free motions – to be subjected to a quasi-static analysis by taking rigid body inertia forces into account.

Conventional static analysis cannot be performed for such systems since, in the absence of constraints, the stiffness matrix is singular. The structure response is measured relative to a steady state accelerating frame, whose motion is induced by the (usually nonzero) external load resultants.

The inertia relief solution procedure provides for three steps, namely i) the rigid body mode evaluation, ii) the assessment of the inertia relief loads, and iii) the solution of a supported, self-equilibrated static loadcase within the moving frame.

A set of nodal DOFs is supplied, one each expected rigid body motion, whose (generalized) displacement values uniquely define the structure positioning in space; also, they may be employed in supporting the structure to untangle the stiffness matrix rank-deficiency.

The  $\underline{t}_l$  rigid body modes are evaluated by sequentially setting each of these *support* DOF to unity, while retaining the others to zero, and solving for the system of equations XXX in the absence of further external loads. Since the tied/retained condition of the structure DOFs does not vary throughout the sequence of aforementioned loadcases, comprised of the final step introduced in the following, a single  $\underline{L} \underline{L}^T$  Cholesky system matrix decomposition is required by the procedure, whose computational burden is thus not significantly increased with respect to the usual static solution.

A rigid body, steady state acceleration field is defined as the linear combination of the  $\underline{t}_l$  rigid body modes

$$\underline{\ddot{d}} = \underbrace{\begin{bmatrix} \vdots \\ \alpha_l \\ \vdots \end{bmatrix}}_{\underline{\alpha}} \underbrace{[\cdots \quad \underline{t}_l \quad \cdots]}_{\underline{T}}, \quad (2.128)$$

<sup>25</sup>XXX some cut and paste from the MSC.Marc vol A manual, please rewrite as required to avoid copyright infringement.

whose  $\alpha_l$  coefficients define the modal acceleration vector  $\underline{\alpha}$ . Those acceleration terms are then evaluated according to the inertial equilibrium of the structure under the applied  $\underline{F}$  external loads, condition, this, that may be stated as

$$\underline{\underline{T}}^\top \underline{\underline{M}} \underline{\underline{T}} \underline{\alpha} = \underline{\underline{T}}^\top \underline{F} \quad (2.129)$$

The projection of the equilibrium equations onto the subspace defined by the linear span of the  $\underline{t}_l$  rigid body mode vectors – i.e. the left multiplication of both the equation sides by the  $\underline{\underline{T}}^\top$  matrix, is solved in place of the overdetermined linear system

$$\underline{\underline{M}} \underline{\underline{T}} \underline{\alpha} = \underline{F} [+ \underline{R}_l]$$

since the  $\underline{R}_l$  reaction forces associated to the rigid body constraints balance the equilibrium residual components that are orthogonal to such allowed configuration subspace.

The inertia relief forces may then be quantified as  $\underline{\underline{M}} \underline{\underline{T}} \underline{\alpha}$ , and superposed to the initial external loads, thus leading to a self equilibrated loading condition in the context of the steady state accelerating frame; by employing the support DOFs to establish a positioning constraint set, the elastic problem may finally be solved.

As a closing comment, the MSC.Marc solver employs a lumped definition for the system mass matrix for evaluating inertia relief forces.

## 2.8.2 Global-Local analysis

XXX

# Chapter 3

## Miscellaneous

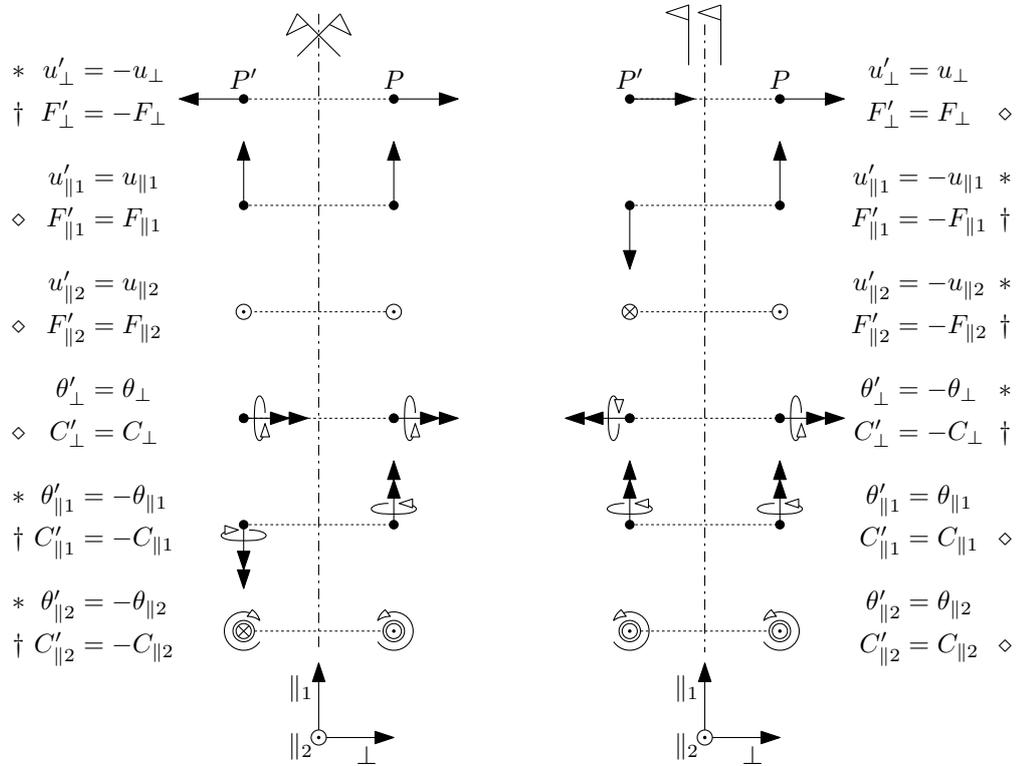


Figure 3.1: An overview of symmetrical and skew-symmetrical (generalized) loading and displacements.

### 3.1 Symmetry and skew-symmetry conditions

Symmetric and skew-symmetric loading conditions are mostly relevant for linearly-behaving systems; a nonlinear system may develop an asymmetric response to symmetric loading (e.g. column buckling).

Figure 3.1 collects symmetrical and skew-symmetrical pairs of vectors and moment vectors (moments); those (generalized) vectors are applied at symmetric points in space with respect to the reference plane. Normal and parallel to the plane vectors are considered, that may embody the same named components of a general vector.

The pair members may be moved towards the reference plane up to a vanishing distance  $\epsilon$ ; a point on the reference plane coincides with its image. In the case different (in particular, opposite and nonzero)

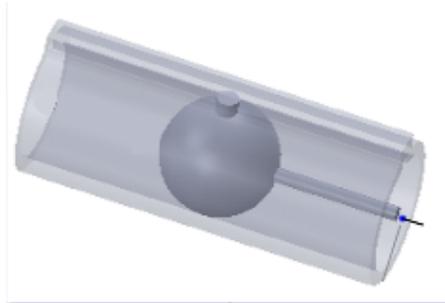


Figure 3.2: The doweled sphere - slotted cylinder joint, which is associated to the skew-symmetry constraint. In this particular application, the cylindrical guide may be considered as grounded.

field vectors are associated to the two coincident pair members, single valuedness does not hold at the reference plane; such condition deserves an attentive rationalization whenever a physical field (displacement field, applied force field, etc.) is to be represented.

Those vector and moment pairs may represent generalized forces (both internal and external) and displacements.

The  $*$  (generalized) displacement components may induce material discontinuity at points laying on the [skew-]symmetry plane, if nonzero. They have to be constrained to zero value at those points, thus introducing [skew-]symmetry constraints.

These constraints act in place of the portion of the structure that is omitted from our model, since the results for the whole structure may be derived from the modeled portion alone, due to [skew-]symmetry.

In case of symmetry, a constraint equivalent to a planar joint is to be applied at points laying on the symmetry plane for ensuring displacement/rotation continuity between the modeled portion of the structure, and its image. In case of skew-symmetry, a constraint equivalent to a *doweled sphere - slotted cylinder* joint (see Figure 3.1), where the guide axis is orthogonal to the skew-symmetry plane, is applied at the points belonging to the intersection between the deformable body and the plane.

The  $\diamond$  internal action components are null at points pertaining to the [skew-]symmetry plane, since they would otherwise violate the action-reaction law. The complementary  $\dagger$  internal action components





are generally nonzero at the [skew-]symmetry plate.

The  $\dagger$  external action components are not allowed at points along the [skew-]symmetry plane; instead, the complementary  $\diamond$  generalized force components are allowed, if they are due to external actions.

In the case of a symmetric structure, generally asymmetric applied loads may be decomposed in a symmetric part and in a skew-symmetric part; the problem may be solved by employing a half structure model for both the loadcases; the results may finally be superposed since the system is assumed linear.

### 3.2 Periodicity conditions

TODO, if needed.



## Bibliography

- [1] C. Hua, “An inverse transformation for quadrilateral isoparametric elements: analysis and application,” *Finite elements in analysis and design*, vol. 7, no. 2, pp. 159–166, 1990.
- [2] T. J. Hughes and T. Tezduyar, “Finite elements based upon mindlin plate theory with particular reference to the four-node bilinear isoparametric element,” *Journal of applied mechanics*, vol. 48, no. 3, pp. 587–596, 1981.